


SINGLE OPERATIONAL AMPLIFIER

■ DESCRIPTION

The UTC M2107 is the single operational amplifier of ultra miniature surface mount package. It has features of low operating supply voltage and low saturation output voltage. It is suitable for small electronic equipments and hybrid circuits.

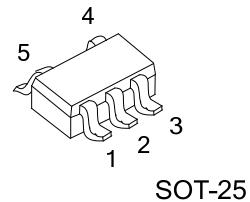

SOT-25

■ FEATURES

- *Operating Voltage ($V^+/V^- = \pm 1.0V$ to $\pm 3.5V$)
- *Low Output Saturation: (4V_{p-p} at single 5V supply)
- *V Shield Plate Between +Input and -Input
- *Suitable Pin Arrangement for Application
- *Bipolar Technology


■ ORDERING INFORMATION

Ordering Number	Package	Pin Assignment					Packing
		1	2	3	4	5	
M2107G-AF5-R	SOT-25	I ⁺	V ⁻	I ⁻	O	V ⁺	Tape Reel


Note: Pin Assignment: I: V_{IN} O: Output

M2107G-AF5-R 	(1) R: Tape Reel (2) AF5: SOT-25 (3) G: Halogen Free and Lead Free
------------------	--


■ MARKING



■ BLOCK DIAGRAM

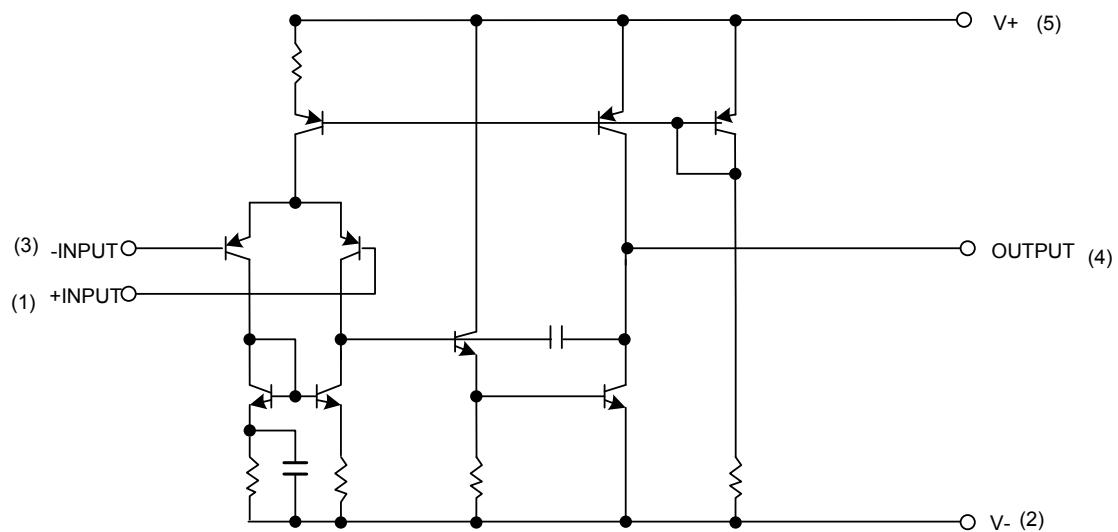

■ TEST CIRCUIT

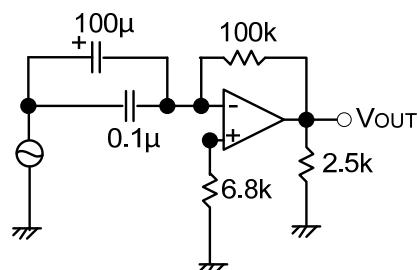

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V+(V+/V-)$	7(or ± 3.5)	V
Differential Input Voltage	$V_{I(\text{DIFF})}$	± 7	V
Input Voltage	V_{IN}	± 3.5	V
Power Dissipation	P_D	200	mW
Operating Temperature	T_{OPR}	-20 ~ +75	$^\circ\text{C}$
Storage Temperature	T_{STG}	-40 ~ +125	$^\circ\text{C}$






Note Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.







■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, $V^+/V^- = \pm 2.5\text{V}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Offset Voltage	$V_{IN(OFF)}$	$R_S=10\text{k}\Omega$		1	6	mV
Input Offset Current	$I_{IN(OFF)}$	$I^+ - I^-$		5	200	nA
Input Bias Current	$I_{IN(BIAS)}$			100	500	nA
Large Signal Voltage Gain	G_V	$V_{OUT}=\pm 2.0\text{V}, R_L=10\text{k}\Omega$	60	80		dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10\text{k}\Omega$	60	70		dB
Input Common Mode Voltage	$V_{IN(CM)}$			± 1.5		V
Rejection Ratio	RR	$R_S \leq 10\text{k}\Omega$	60	80		dB
Output Voltage Swing	V_{OM}	$R_L=2.5\text{k}\Omega$	± 2.0	± 2.2		V
Slew Rate	SR	$V_{IN}=\pm 1\text{Vp-p}, A_{CL}=+1$		3		$\text{V}/\mu\text{s}$
Operating Current	I_{OPR}		1	2	3	mA



■ TYPICAL CHARACTERISTICS

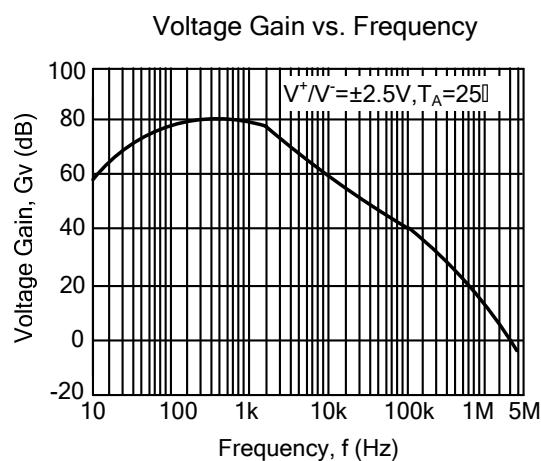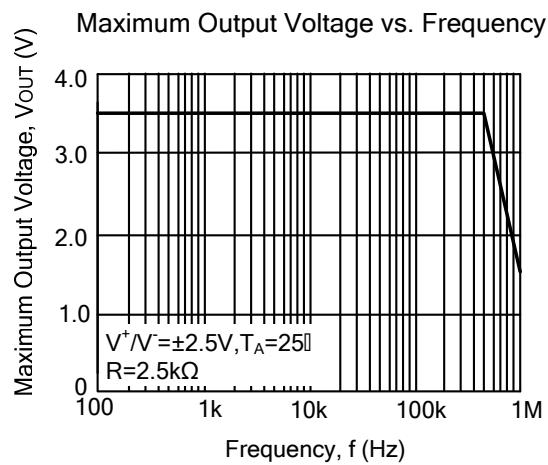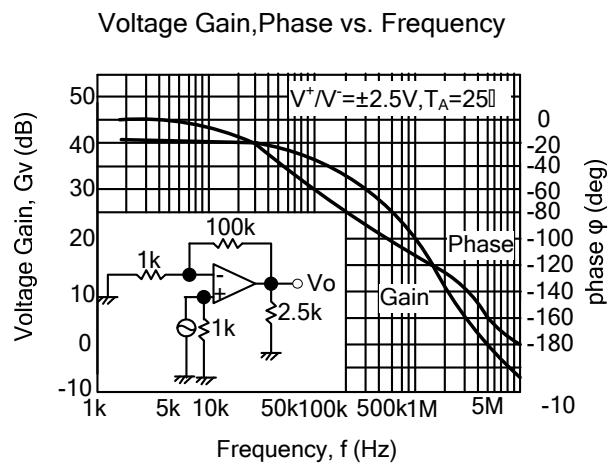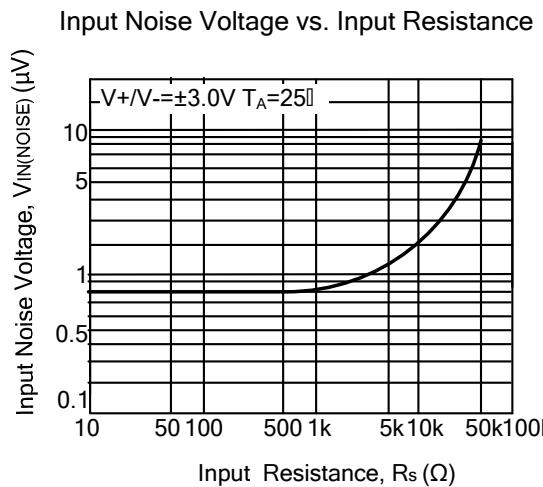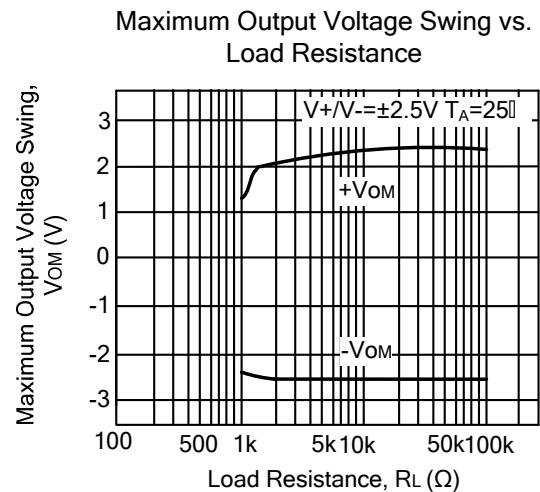

■ TYPICAL CHARACTERISTICS (Cont.)

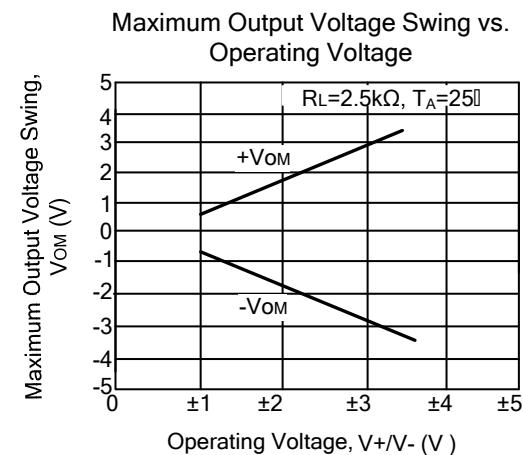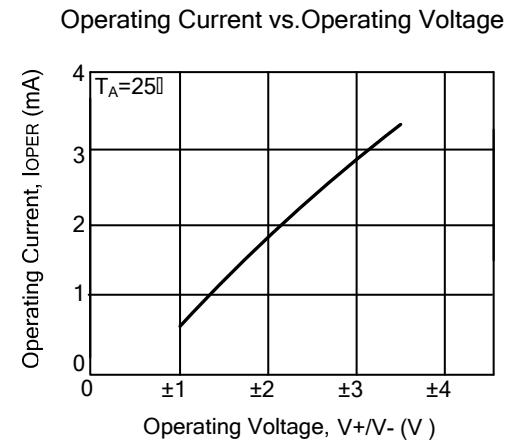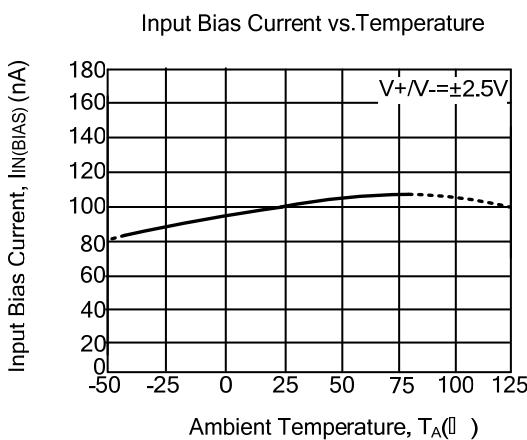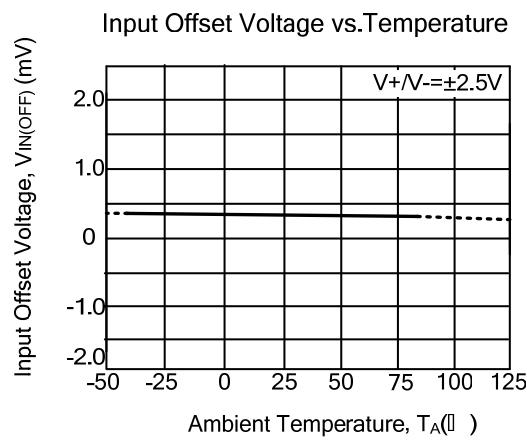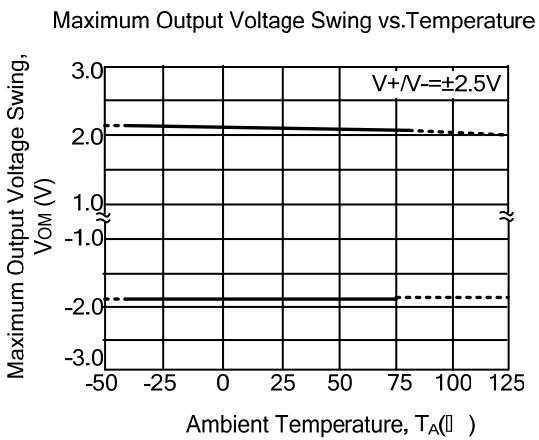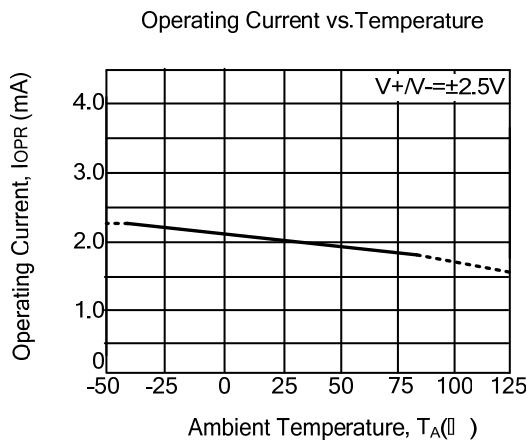

■ TYPICAL CHARACTERISTICS (Cont.)

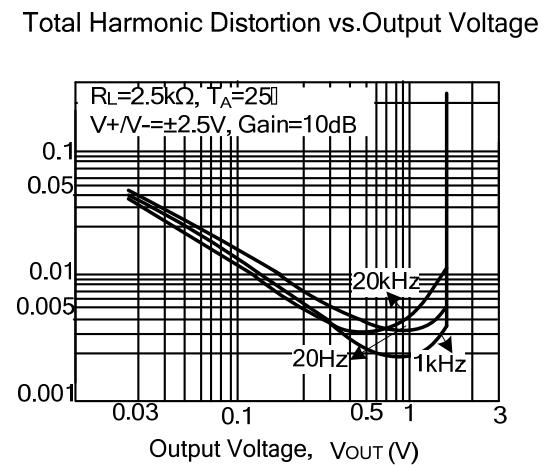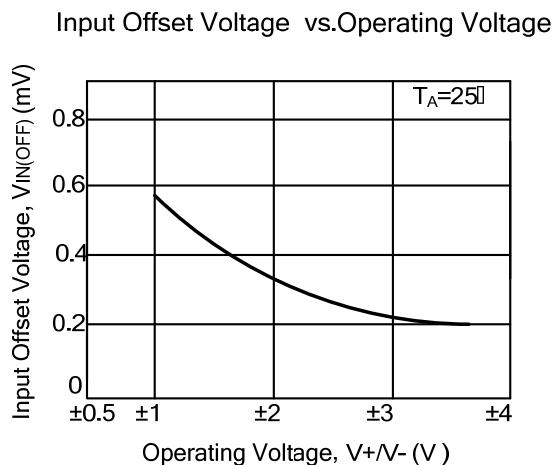

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.