



UTL7660H

CMOS IC


CHARGE PUMP DC-DC VOLTAGE CONVERTER

DESCRIPTION

UTC **UTL7660H** is a charge pump DC-DC voltage converter using AL-gate CMOS technology and optimization design. It converts a +1.5V to +10V input to a corresponding -1.5V to -10V output using only two external capacitors, eliminating inductors and their associated cost, size and EMI. The on-board oscillator operates at a nominal frequency of 20KHZ. Operation frequency can be decreased by adding an external capacitor to the oscillator (OSC) terminal.

FEATURES

- * Converts +5V Logic supply to $\pm 5V$ double-phase electrical Voltage
- * Wide input voltage range: 1.5V ~ 10V
- * Efficient voltage conversion: 99.9%
- * Good power efficiency: 98%
- * Low power supply: 55 μ A @ 5 Vin
- * Only two external capacitors required
- * Compatible with RS232 negative power supply standard
- * No Dx diode needed for high voltage operation




SOP-8

ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
UTL7660HL-S08-R	UTL7660HG-S08-R	SOP-8	Tape Reel

<p>UTL7660HG-S08-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) R: Tape Reel (2) S08: SOP-8 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---	--

MARKING

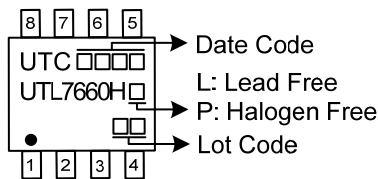


■ PIN CONFIGURATION

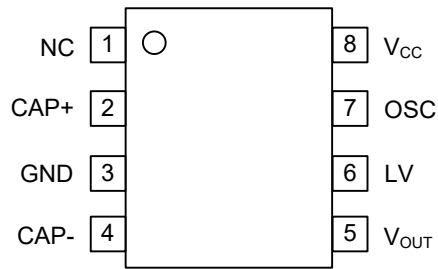

■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	NC	No connection
2	CAP+	Connection external capacitor (+) pin
3	GND	Ground Pin
4	CAP-	Connection external capacitor (-) pin
5	V _{OUT}	Voltage output pin
6	LV	Low voltage selection pin
7	OSC	Connecting oscillation capacitor pin
8	V _{CC}	Power supply pin

■ BLOCK DIAGRAM

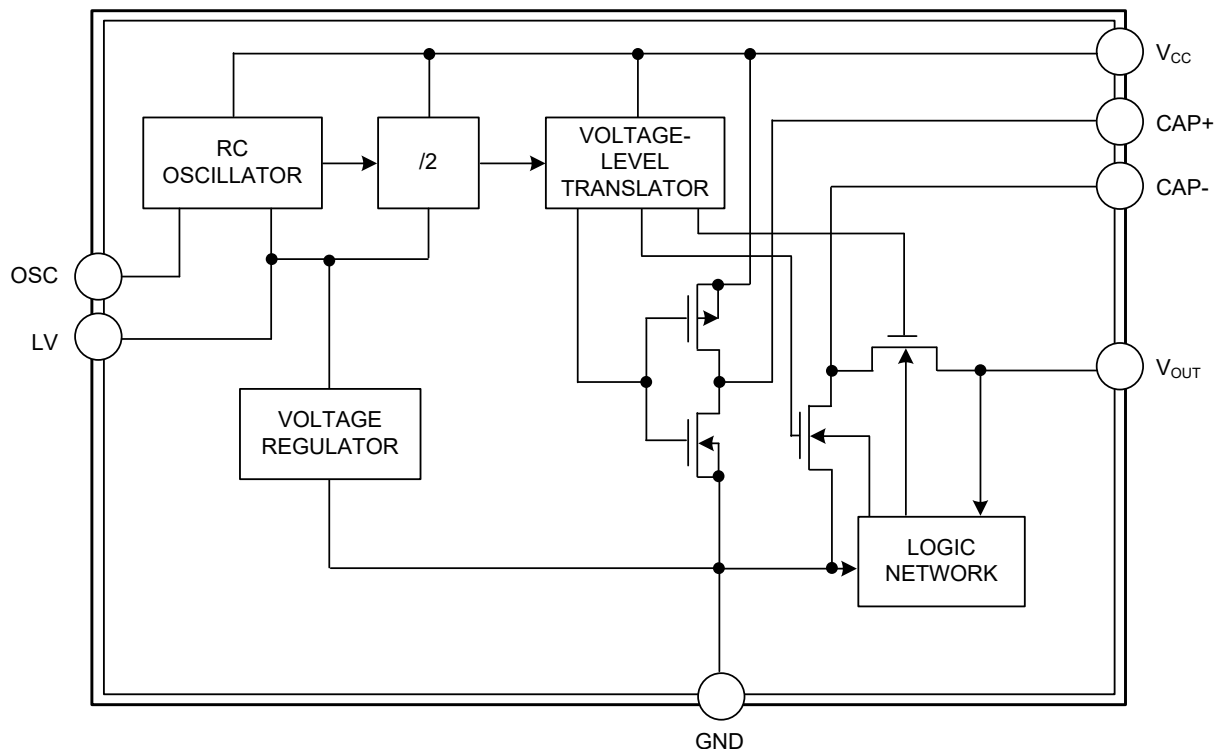

■ ABSOLUTE MAXIMUM RATING


PARAMETER		SYMBOL	RATINGS	UNIT
Supply Voltage		V_{CC}	10.5	V
LV and OSC Inputs Voltage	$V_{CC} < 5.5V$	V_i	$-0.3 \sim V_{CC} + 0.3$	V
	$V_{CC} > 5.5V$		$V_{CC} - 5.5 \sim V_{CC} + 0.3$	V
Current Into LV	$V_{CC} > 3.5V$	I_{LV}	20	μA
Output Short-circuit duration	$V_{SUPPLY} \pm 5.5V$	t_{OS}	Continuous	
Junction Temperature		T_J	+150	$^{\circ}C$
Storage Temperature		T_{STG}	-55 ~ +150	$^{\circ}C$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}C$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
$V_{CC} = 5V, C_{OSC} = 0, LV = Open$						
Supply Current	I_{CC}	$R_L = \infty$		55	110	μA
Supply Voltage Range (Low)	V_{CC_LOW}	$R_L = 10K\Omega, LV = GND$	1.5		3.5	V
Supply Voltage Range (high)	V_{CC_HIGH}	$R_L = 10K\Omega, LV = Open$	3		10	V
Output Source Resistance	R_{OUT}	$I_O = 20mA$		55		Ω
		$V_{CC} = 2V, I_O = 3mA, LV = GND$		160		Ω
Oscillator Frequency	f_{OSC}			20		kHz
Power Efficiency	η_{POWER}	$R_L = 5K\Omega$	95	98		%
Voltage Conversion Efficiency	η_{VOUT}	$R_L = \infty$	99	99.9		%
$V_{CC} = 3V, C_{OSC} = 0, LV = GND$						
Supply Current	I_{CC}	$R_L = \infty$		35	60	μA
Output Source Resistance	R_{OUT}	$I_O = 10mA$		80		Ω
Oscillator Frequency	f_{OSC}	$C_{OSC} = 0$		18		kHz
Power Efficiency	η_{POWER}	$R_L = 5K\Omega$	95	98		%
Voltage Conversion Efficiency	η_{VOUT}	$R_L = \infty$	99			%

■ TESTING CIRCUIT

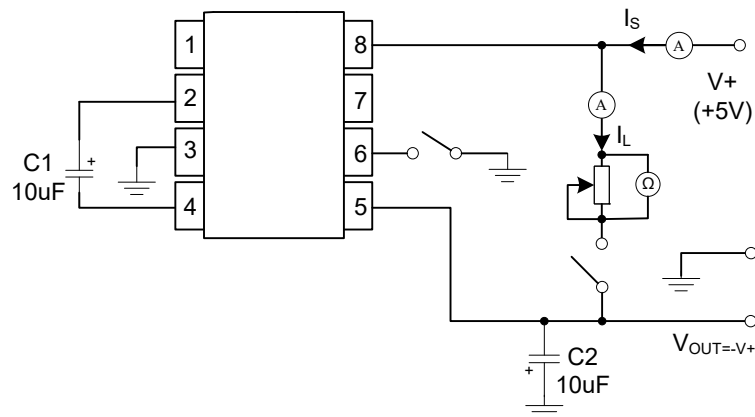


■ APPLICATION INFORMATION

Do's and Don'ts


1. Do not exceed maximum supply voltages.
2. Do not connect terminal-6(LV) to terminal-3(GND) when supply voltages greater than 3.5V.
3. Do not make the terminal-5 (V_{OUT}) short to terminal-8 (V_{CC}) for supply voltages above 5.5V for extended periods.
4. When using polarized capacitors, the positive terminal of C1 must be connected to terminal-2 (CAP+), and the positive terminal of C2 must be connected to GND.
5. If the voltage supply has a large source impedance ($25\Omega - 30\Omega$), then a $2.2\mu F$ capacitor from terminal-8(V_{CC}) to ground may be required to limit rising-rate of input voltage to less than $2V/\mu S$.
6. Ensure that the terminal-5 (V_{OUT}) does not go more positive than terminal-3 (GND). Device latch up occurs under these conditions. A UTC 1N4148 or similar diode placed in parallel with C2 prevents the device from latching up under these conditions (anode to terminal 5, cathode to terminal 3)

■ TYPICAL APPLICATION CIRCUIT

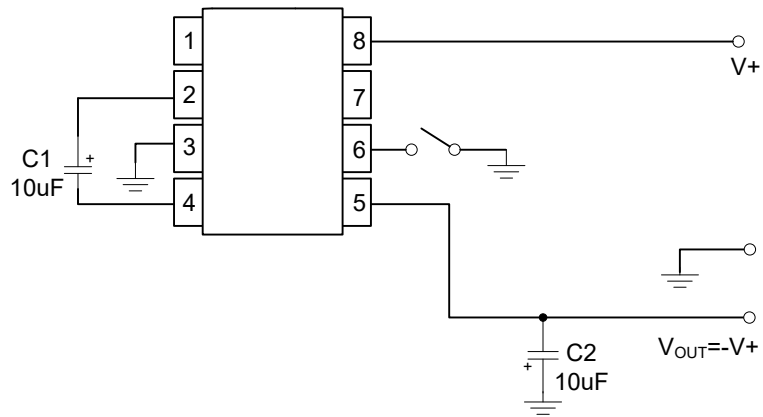

Above figure is the basic application circuit to provide a negative supply from -1.5V ~ -10V while a positive supply from +1.5V ~ +10V is available. When $V_{CC}=+5V$, the output resistance is about 100Ω; The output voltage is -4V while the load current is 10mA.


$$R_{OUT} = R_{OUT} \text{ (of UTL7660H)} / n \text{ (number of devices)}$$

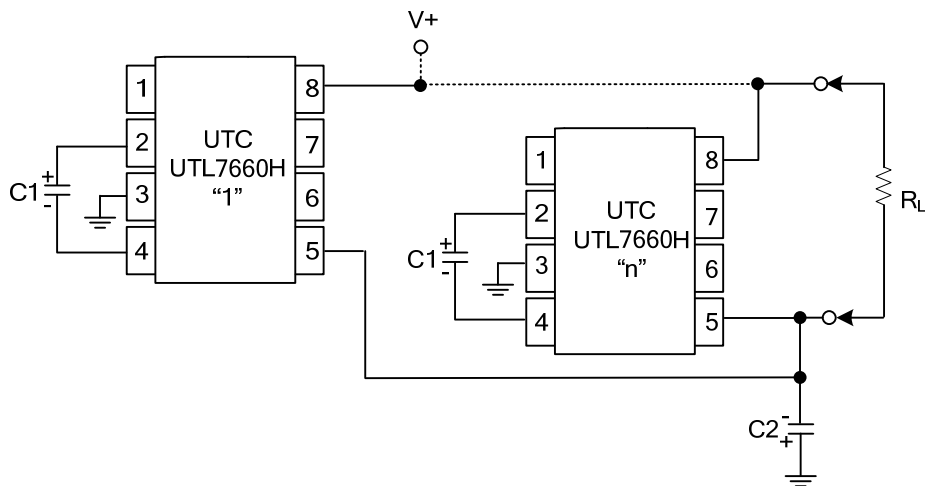

Paralleling Devices

■ TYPICAL APPLICATION CIRCUIT (Cont.)

$$V_{OUT} = -n (V_{IN})$$

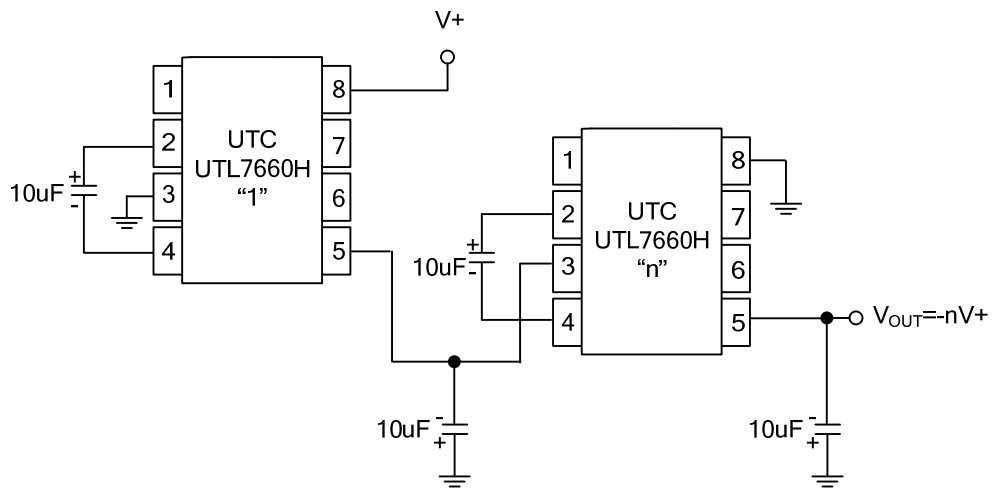

Cascading Devices for Increased Output Voltage

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.