



UTL1426

Power MOSFET

N-CHANNEL ENHANCEMENT
MODE FIELD EFFECT
TRANSISTOR


■ DESCRIPTION

The **UTL1426** uses UTC's advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

■ FEATURES

- * $R_{DS(ON)} < 10.5 \text{ m}\Omega @ V_{GS} = 10\text{V}$
- * $R_{DS(ON)} < 12.5 \text{ m}\Omega @ V_{GS} = 4.5\text{V}$
- * Low capacitance
- * Low gate charge
- * Fast switching capability
- * Avalanche energy specified

■ SYMBOL

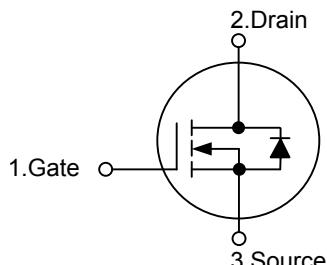


■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
UTL1426L-S08-R	UTL1426G-S08-R	SOP-8	Tape Reel

UTL1426G-S08-R	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) S08: SOP-8 (3) G: Halogen Free and Lead Free, L: Lead Free
----------------	--	---

■ MARKING

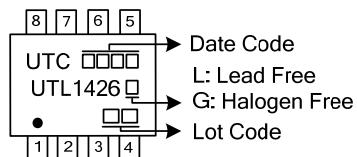

■ PIN CONFIGURATION

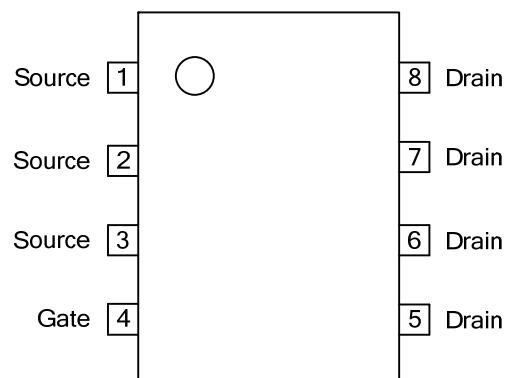

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Drain-Source Voltage	V_{DSS}	30	V
Gate-Source Voltage	V_{GSS}	± 12	V
Continuous Drain Current	I_D	46	A
Pulsed Drain Current	I_{DM}	120	A
Avalanche Current	I_{AR}	35	A
Repetitive avalanche energy L=0.3mH	E_{AR}	184	mJ
Power Dissipation	$T_C=25^\circ\text{C}$	P_D	43
Junction Temperature	T_J	+175	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55 ~ +175	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.






■ THERMAL DATA

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Junction-to-Ambient	θ_{JA}	53	64		$^\circ\text{C}/\text{W}$
Junction-to-Case	θ_{JC}	2.4	3.5		$^\circ\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0\text{V}, I_D=250\mu\text{A}$	30			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=24\text{V}, V_{GS}=0\text{V}$			1	uA
Gate-Body Leakage Current	I_{GSS}	$V_{DS}=0\text{V}, V_{GS}=\pm 12\text{V}$			0.1	uA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{GS(\text{TH})}$	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	1	1.55	2.5	V
On State Drain Current	$I_{D(\text{ON})}$	$V_{DS}=5\text{V}, V_{GS}=10\text{V}$	120			A
Static Drain-Source On-Resistance	$R_{DS(\text{ON})}$	$V_{GS}=10\text{V}, I_D=20\text{A}$		8.5	10.5	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}, I_D=20\text{A}$		10.2	12.5	
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	$V_{DS}=15\text{V}, V_{GS}=0\text{V}, f=1\text{MHz}$		1210	1452	pF
Output Capacitance	C_{OSS}			330		pF
Reverse Transfer Capacitance	C_{RSS}			85		pF
SWITCHING PARAMETERS						
Total Gate Charge 10V 4.5V	Q_G	$V_{DS}=15\text{V}, V_{GS}=10\text{V}, I_D=20\text{A}$		22	28	nC
Gate Source Charge	Q_{GS}			10		nC
Gate Drain Charge	Q_{GD}			3.7		nC
Turn-ON Delay Time	$t_{D(\text{ON})}$			2.7		nC
Turn-ON Rise Time	t_R	$V_{GS}=10\text{V}, V_{DS}=15\text{V}, R_L=0.75\Omega, R_{GEN}=3\Omega$		10		ns
Turn-OFF Delay Time	$t_{D(\text{OFF})}$			6.3		ns
Turn-OFF Fall-Time	t_F			21		ns
				2.8		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Body-Diode Continuous Current	I_S	$I_S=1\text{A}, V_{GS}=0\text{V}$			46	A
Diode Forward Voltage	V_{SD}			0.73	1.0	V
Body Diode Reverse Recovery Time	t_{rr}			36	45	ns
Body Diode Reverse Recovery Charge	Q_{rr}		$I_F=20\text{A}, dI/dt=100\text{A}/\mu\text{s}$	47		nC

■ TYPICAL CHARACTERISTICS

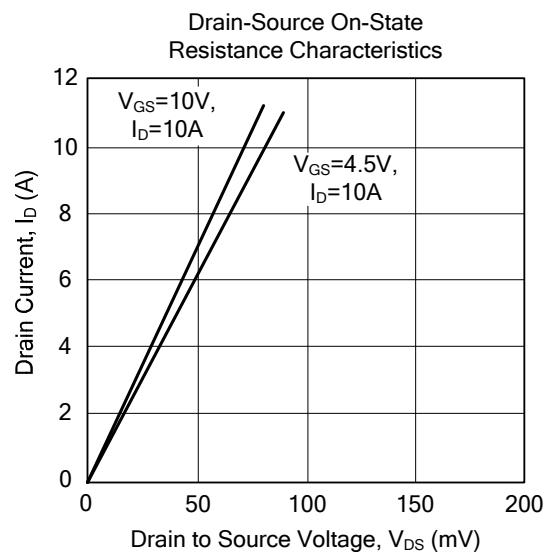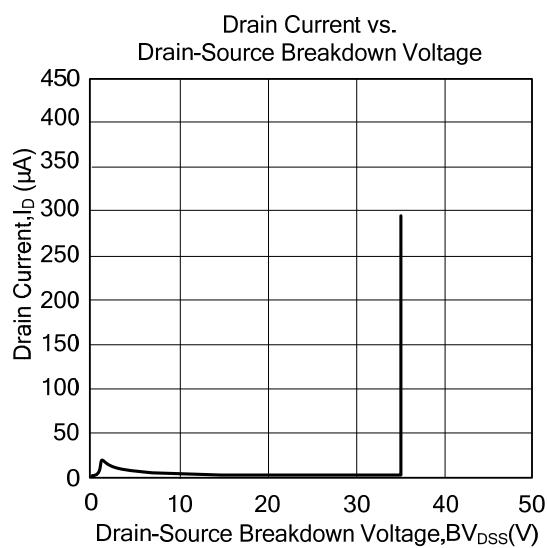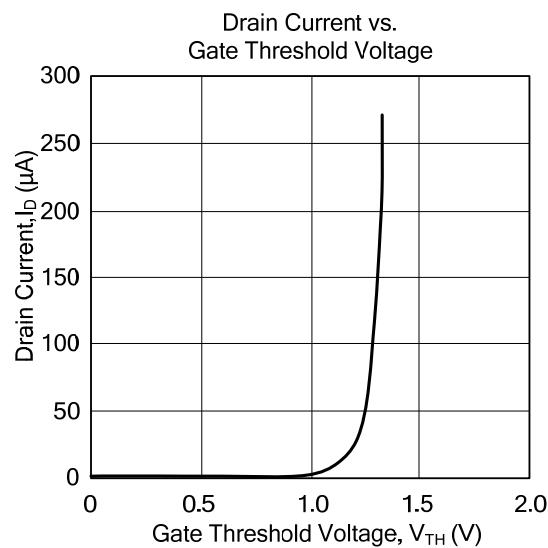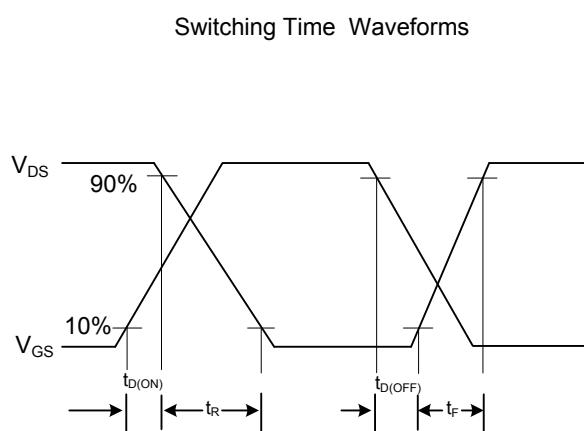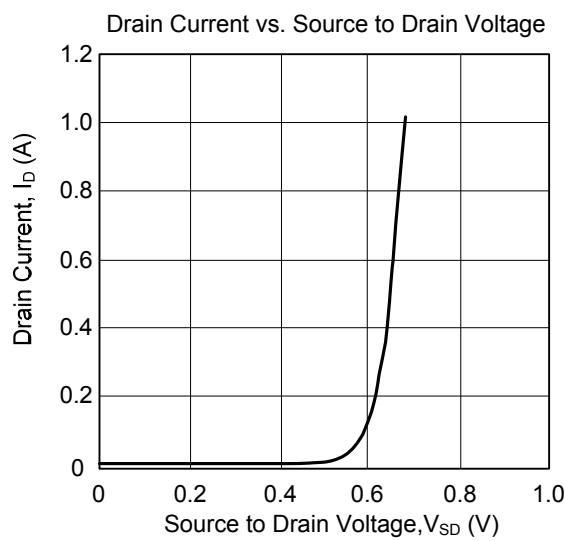

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.



UNISONIC TECHNOLOGIES CO., LTD

www.unisonic.com.tw