



LIR05AF-25

LIGHT EMITTING DIODE


LED LAMP

DESCRIPTION

UTC **LIR05AF-25** is a high intensity infrared emitting diode, molded in a water clear plastic package.

APPLICATIONS

- * TV, VCR, DVD
- * Sound equipment
- * Air conditioner
- * Infrared applied system

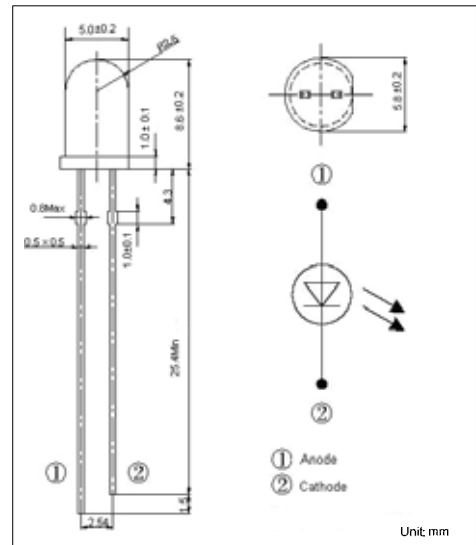

ORDERING INFORMATION

Ordering Number
LIR05AF-25

<p>L I R 0 5 A F - 2 5</p> <p>(1)View Angle</p> <p>(2)Package Outline</p> <p>(3)Encapsulate Type</p> <p>(4)Diameter of Lamp</p> <p>(5)Color Type</p> <p>(6)Product Type</p>	<p>(1) 25: 25°±3°</p> <p>(2) F: Round with Brim</p> <p>(3) A: Colorless Transparent</p> <p>(4) 05: Φ5</p> <p>(5) IR: Infra Red 940nm</p> <p>(6) L: Lamp</p>
---	---

■ ABSOLUTE MAXIMUM RATINGS (Ta=25)

PARAMETER	SYMBOL	RATINGS	UNIT
Reverse Voltage	V_R	5	V
Forward Current	I_F	100	mA
Peak Forward Current (Pulse Test)	I_{FM}	1000	mA
Power Dissipation	P_D	150	mW
Operation Temperature	T_{OPR}	-25 ~ +85	
Storage Temperature	T_{STG}	-40 ~ +85	

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL OPTICAL CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage	V_F	$I_F=20mA$		1.2	1.45	V
	V_F	$I_F=200mA$		1.42		V
Reverse Current	I_R	$V_R=5V$			10	μA
Peak Wavelength	λ_p	$I_F=20mA$		940		nm
Spectral Radiation Bandwidth	$\Delta\lambda$	$I_F=20mA$		50		nm
Viewing Angle	$2\theta_{1/2}$			25		Deg
Raise Time	t_R	$I_F=20mA$		2		μs
Fall Time	t_F	$I_F=20mA$		1		μs
Luminous Intensity	I_e	$I_F=100mA, t_p=20ms$	40	60	200	mW/sr

■ TYPICAL ELECTRO-OPTICAL CHARACTERISTICS CURVES


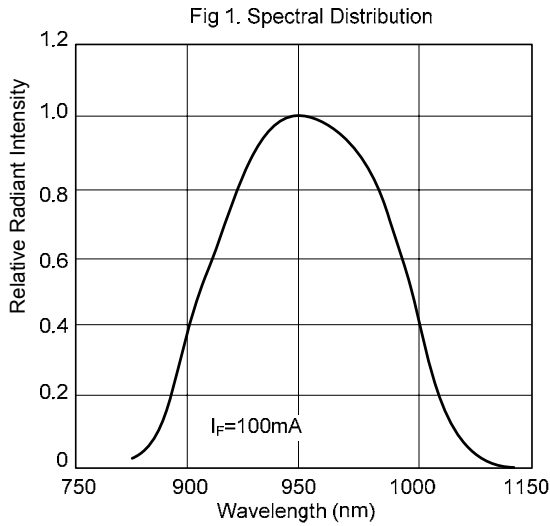


Fig 2. Relative Radiant Intensity vs. Angular Displacement

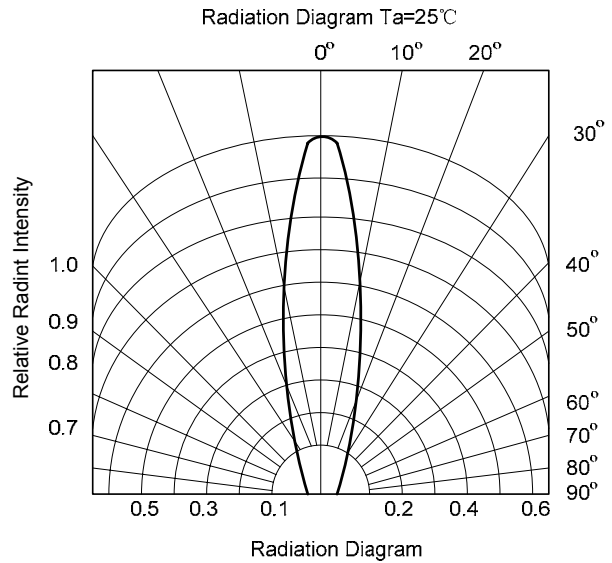

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.