




BAV20W

Preliminary

DIODE

SILICON EPITAXIAL PLANAR DIODE

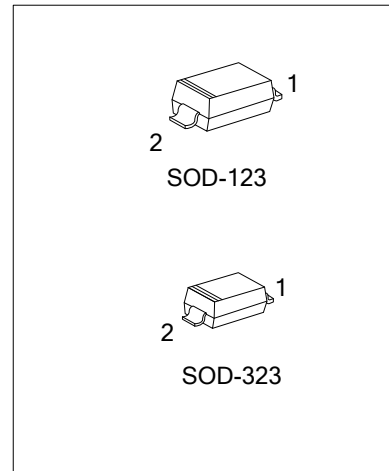

DESCRIPTION

The UTC **BAV20W** is a silicon epitaxial planar diode. The UTC **BAV20W** is suitable for general purpose application.

FEATURES

- * Planar diode
- * For general purpose application
- * Low leakage current


ORDERING INFORMATION

Ordering Number	Package	Pin Assignment		Packing
		1	2	
BAV20WG-CA2-R	SOD-123	A	K	Tape Reel
BAV20WG-CB2-R	SOD-323	A	K	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

<p>BAV20WG-CA2-R</p> <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) R: Tape Reel (2) CA2: SOD-123, CB2: SOD-323 (3) G: Halogen Free and Lead Free</p>
---	--

MARKING



■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Repetitive Peak Reverse Voltage	V_{RRM}	200	V
Continuous Reverse Voltage	V_R	150	V
Forward DC Current at $T_A=25^\circ\text{C}$ (Note 2)	I_F	250	mA
Rectified Current (Average) Half Wave Rectification with Resist. Load at $T_A=25^\circ\text{C}$ (Note 2)	I_O	200	mA
Repetitive Peak Forward Current at $f>50\text{Hz}$, $T_A=25^\circ\text{C}$ (Note 2)	I_{FRM}	625	mA
Surge Forward Current at $t<1\text{s}$, $T_J=25^\circ\text{C}$	I_{FSM}	1.0	A
Power Dissipation at $T_A=25^\circ\text{C}$ (Note 2)	P_D	410	mW
Junction Temperature	T_J	-55~+150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~+150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Valid provided that leads are kept at ambient temperature.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	200	$^\circ\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage	V_F	$I_F=100\text{mA}$			1.00	V
		$I_F=200\text{mA}$			1.25	V
Leakage Current	I_R	$V_R=150\text{V}$			100	nA
		$V_R=150\text{V}$, $T_J=100^\circ\text{C}$			15	μA
Dynamic Forward Resistance	R_F	$I_F=10\text{mA}$		5.0		Ω
Reverse Recovery Time	t_{rr}	$I_F=30\text{mA}$, $I_R=30\text{mA}$, $I_{rr}=3.0\text{mA}$, $R_L=100\Omega$			50	ns
Capacitance Between Terminals	C_T	$V_R=0$, $f=1.0\text{MHz}$		1.5		pF

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.