



SMCJ

TVS DIODE


SURFACE MOUNT TRANSIENT VOLTAGE SUPPRESSORS

DESCRIPTION


The UTC **SMCJ** is a surface mount transient voltage suppressors, it uses UTC's advanced technology to provide customers with low leakage and very fast response time, etc.

FEATURES

- * Excellent clamping capability
- * Low leakage
- * Very fast response time

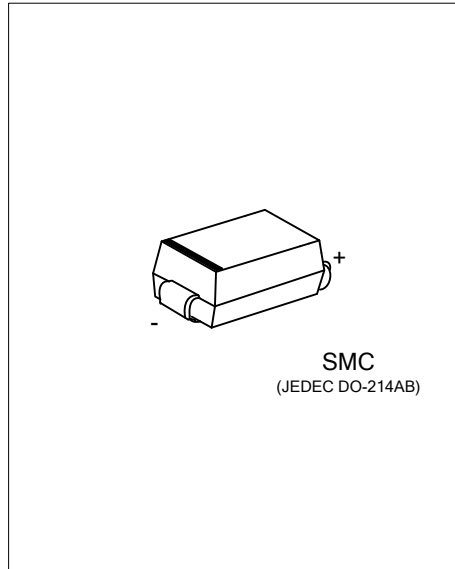

SYMBOL




ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
SMCJXXXXAL-SMC-R	SMCJXXXXAG-SMC-R	SMC	K	A	Tape Reel
SMCJXXXXCAL-SMC-R	SMCJXXXXCAG-SMC-R	SMC	K	K	Tape Reel

Note: Pin Assignment: K: Cathode A: Anode

SMCJXXXXXG-SMA-R	(1) Packing Type	(1) R: Tape Reel
	(2) Package Type	(2) SMA: SMA
	(3) Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free
	(4) Category	(4) A: 5% uni-directional, CA: 5% Bi-directional
	(5) Output Voltage Code	(5) xx: refer to ELECTRICAL CHARACTERISTICS

MARKING

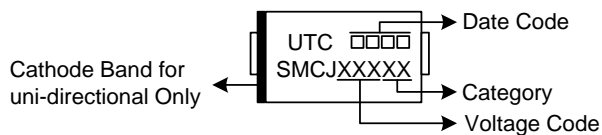

■ **ABSOLUTE MAXIMUM RATING** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Peak Power Dissipation with a 10/1000 μs Waveform (Note 2)	P_{PP}	1500	W
Peak Pulse Current with a 10/1000 μs Waveform (Note 2)	I_{PP}	See ELECTRICAL CHARACTERISTICS Table	A
Power Dissipation On Infinite Heatsink at $T_L=75^{\circ}\text{C}$	P_D	6.5	W
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Unidirectional Only (Note 3)	I_{FSM}	200	A
Maximum Instantaneous Forward Voltage at 50 A for Unidirectional Only (Note 4)	V_F	3.5/5.0	V
Operating Junction Temperature	T_J	-55 ~ +150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 ~ +150	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Non-repetitive current pulse and derated above $T_A=25^{\circ}\text{C}$

3. Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.

4. $V_F<3.5\text{V}$ for devices of $V_{BR}<200\text{V}$ and $V_F<5.0\text{V}$ for devices of $V_{BR}>201\text{V}$.

■ **ELECTRICAL CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PART NUMBER (Uni)	PART NUMBER (Bi)	BREAKDOWN VOLTAGE V_{BR} @ I_T			MAXIMUM REVERSE LEAKAGE I_R @ V_{RWM} (μA)	WORKING PEAK REVERSE VOLTAGE V_{RWM} (V)	MAXIMUM REVERSE SURGE CURRENT I_{PP} (A)	MAXIMUM CLAMPING VOLTAGE V_C @ I_{PP} (V)
		MIN (V)	MAX (V)	I_T (mA)				
SMCJ5.0	SMCJ5.0C	6.40	7.30	10	800	5.0	156.25	9.6
SMCJ5.0A	SMCJ5.0CA	6.40	7.00	10	800	5.0	163.04	9.2
SMCJ6.0	SMCJ6.0C	6.67	8.15	10	800	6.0	131.58	11.4
SMCJ6.0A	SMCJ6.0CA	6.67	7.37	10	800	6.0	145.63	10.3
SMCJ6.5	SMCJ6.5C	7.22	8.82	10	500	6.5	121.95	12.3
SMCJ6.5A	SMCJ6.5CA	7.22	7.98	10	500	6.5	133.93	11.2
SMCJ7.0	SMCJ7.0C	7.78	9.51	10	200	7.0	112.78	13.3
SMCJ7.0A	SMCJ7.0CA	7.78	8.60	10	200	7.0	125.00	12.0
SMCJ7.5	SMCJ7.5C	8.33	10.20	1	100	7.5	104.90	14.3
SMCJ7.5A	SMCJ7.5CA	8.33	9.21	1	100	7.5	116.28	12.9
SMCJ8.0	SMCJ8.0C	8.89	10.90	1	50	8.0	100.00	15.0
SMCJ8.0A	SMCJ8.0CA	8.89	9.83	1	50	8.0	110.29	13.6
SMCJ8.5	SMCJ8.5C	9.44	11.50	1	10	8.5	94.34	15.9
SMCJ8.5A	SMCJ8.5CA	9.44	10.40	1	10	8.5	104.17	14.4
SMCJ9.0	SMCJ9.0C	10.00	12.20	1	5	9.0	88.76	16.9
SMCJ9.0A	SMCJ9.0CA	10.00	11.10	1	5	9.0	97.40	15.4
SMCJ10	SMCJ10C	11.10	13.60	1	5	10.0	79.79	18.8
SMCJ10A	SMCJ10CA	11.10	12.30	1	5	10.0	88.24	17.0
SMCJ11	SMCJ11C	12.20	14.90	1	1	11.0	74.63	20.1
SMCJ11A	SMCJ11CA	12.20	13.50	1	1	11.0	82.42	18.2
SMCJ12	SMCJ12C	13.30	16.30	1	1	12.0	68.18	22.0
SMCJ12A	SMCJ12CA	13.30	14.70	1	1	12	75.38	19.9
SMCJ13	SMCJ13C	14.40	17.60	1	1	13.0	63.03	23.8
SMCJ13A	SMCJ13CA	14.40	15.90	1	1	13.0	69.77	21.5
SMCJ14	SMCJ14C	15.60	19.10	1	1	14.0	58.14	25.8
SMCJ14A	SMCJ14CA	15.60	17.20	1	1	14.0	64.66	23.2

■ ELECTRICAL CHARACTERISTICS (Cont.)

PART NUMBER (Uni)	PART NUMBER (Bi)	BREAKDOWN VOLTAGE V_{BR} @ I_T			MAXIMUM REVERSE LEAKAGE I_R @ V_{RWM} (μ A)	WORKING PEAK REVERSE VOLTAGE V_{RWM} (V)	MAXIMUM REVERSE SURGE CURRENT I_{PP} (A)	MAXIMUM CLAMPING VOLTAGE V_C @ I_{PP} (V)
		MIN (V)	MAX (V)	I_T (mA)				
SMCJ15	SMCJ15C	16.70	20.40	1	1	15.0	55.76	26.9
SMCJ15A	SMCJ15CA	16.70	18.50	1	1	15.0	61.48	24.4
SMCJ16	SMCJ16C	17.80	21.80	1	1	16.0	52.08	28.8
SMCJ16A	SMCJ16CA	17.80	19.70	1	1	16.0	57.69	26.0
SMCJ17	SMCJ17C	18.90	23.10	1	1	17.0	49.18	30.5
SMCJ17A	SMCJ17CA	18.90	20.90	1	1	17.0	54.35	27.6
SMCJ18	SMCJ18C	20.00	24.40	1	1	18.0	46.58	32.2
SMCJ18A	SMCJ18CA	20.00	22.10	1	1	18	51.375	29.2
SMCJ19	SMCJ19C	21.13	25.76	1	1	19.0	44.10	34.0
SMCJ19A	SMCJ19CA	21.10	23.30	1	1	19.0	48.76	30.8
SMCJ20	SMCJ20C	22.20	27.10	1	1	20.0	41.90	35.8
SMCJ20A	SMCJ20CA	22.20	24.50	1	1	20.0	46.30	32.4
SMCJ22	SMCJ22C	24.40	29.80	1	1	22.0	38.07	39.4
SMCJ22A	SMCJ22CA	24.40	26.90	1	1	22.0	42.25	35.5
SMCJ24	SMCJ24C	26.70	32.60	1	1	24.0	34.88	43.0
SMCJ24A	SMCJ24CA	26.70	29.50	1	1	24	38.56	38.9
SMCJ26	SMCJ26C	28.90	35.30	1	1	26.0	32.19	46.6
SMCJ26A	SMCJ26CA	28.90	31.90	1	1	26	35.63	42.1
SMCJ28	SMCJ28C	31.10	38.00	1	1	28.0	30.00	50.0
SMCJ28A	SMCJ28CA	31.10	34.40	1	1	28	33.04	45.4
SMCJ30	SMCJ30C	33.30	40.70	1	1	30.0	28.04	53.5
SMCJ30A	SMCJ30CA	33.30	36.80	1	1	30	30.99	48.4
SMCJ33	SMCJ33C	36.70	44.90	1	1	33.0	25.42	59.0
SMCJ33A	SMCJ33CA	36.70	40.60	1	1	33	28.14	53.3
SMCJ36	SMCJ36C	40.00	48.90	1	1	36.0	23.33	64.3
SMCJ36A	SMCJ36CA	40.00	44.20	1	1	36	25.82	58.1
SMCJ40	SMCJ40C	44.40	54.30	1	1	40.0	21.01	71.4
SMCJ40A	SMCJ40CA	44.40	49.10	1	1	40.0	23.26	64.5
SMCJ43	SMCJ43C	47.80	58.40	1	1	43.0	19.56	76.7
SMCJ43A	SMCJ43CA	47.80	52.80	1	1	43.0	21.61	69.4
SMCJ45	SMCJ45C	50.00	61.10	1	1	45.0	18.68	80.3
SMCJ45A	SMCJ45CA	50.00	55.30	1	1	45.0	20.63	72.7
SMCJ48	SMCJ48C	53.30	65.10	1	1	48.0	17.54	85.5
SMCJ48A	SMCJ48CA	53.30	58.90	1	1	48.0	19.38	77.4
SMCJ51	SMCJ51C	56.70	69.30	1	1	51.0	16.47	91.1
SMCJ51A	SMCJ51CA	56.70	62.70	1	1	51.0	18.20	82.4
SMCJ54	SMCJ54C	60.00	73.30	1	1	54.0	15.58	96.3
SMCJ54A	SMCJ54CA	60.00	66.30	1	1	54.0	17.22	87.1
SMCJ58	SMCJ58C	64.40	78.70	1	1	58.0	14.56	103.0
SMCJ58A	SMCJ58CA	64.40	71.20	1	1	58	16.03	93.6
SMCJ60	SMCJ60C	66.70	81.50	1	1	60.0	14.02	107.0
SMCJ60A	SMCJ60CA	66.70	73.70	1	1	60.0	15.50	96.8
SMCJ64	SMCJ64C	71.10	86.90	1	1	64.0	13.16	114.0
SMCJ64A	SMCJ64CA	71.10	78.60	1	1	64.0	14.56	103.0
SMCJ70	SMCJ70C	77.80	95.10	1	1	70.0	12.00	125.0
SMCJ70A	SMCJ70CA	77.80	86.00	1	1	70.0	13.27	113.0

■ ELECTRICAL CHARACTERISTICS (Cont.)

PART NUMBER (Uni)	PART NUMBER (Bi)	BREAKDOWN VOLTAGE V_{BR} @ I_T			MAXIMUM REVERSE LEAKAGE CURRENT I_R @ V_{RWM} (μ A)	WORKING PEAK REVERSE VOLTAGE V_{RWM} (V)	MAXIMUM REVERSE SURGE CURRENT I_{PP} (A)	MAXIMUM CLAMPING VOLTAGE V_C @ I_{PP} (V)
		MIN (V)	MAX (V)	I_T (mA)				
SMCJ75	SMCJ75C	83.30	102.00	1	1	75.0	11.19	134.0
SMCJ75A	SMCJ75CA	83.30	92.10	1	1	75.0	12.40	121.0
SMCJ78	SMCJ78C	86.70	106.00	1	1	78.0	10.79	139.0
SMCJ78A	SMCJ78CA	86.70	95.80	1	1	78.0	11.90	126.0
SMCJ80	SMCJ80C	88.96	108.80	1	1	80.0	10.47	143.2
SMCJ80A	SMCJ80CA	88.80	97.60	1	1	80.0	11.57	129.6
SMCJ85	SMCJ85C	94.40	115.00	1	1	85.0	9.93	151.0
SMCJ85A	SMCJ85CA	94.40	104.00	1	1	85.0	10.95	137.0
SMCJ90	SMCJ90C	100.00	122.00	1	1	90.0	9.38	160.0
SMCJ90A	SMCJ90CA	100.00	111.00	1	1	90.0	10.27	146.0
SMCJ100	SMCJ100C	111.00	136.00	1	1	100.0	8.38	179.0
SMCJ100A	SMCJ100CA	111.00	123.00	1	1	100.0	9.26	162.0
SMCJ110	SMCJ110C	122.00	149.00	1	1	110.0	7.65	196.0
SMCJ110A	SMCJ110CA	122.00	135.00	1	1	110.0	8.47	177.0
SMCJ120	SMCJ120C	133.00	163.00	1	1	120.0	7.01	214.0
SMCJ120A	SMCJ120CA	133.00	147.00	1	1	120.0	7.77	193.0
SMCJ130	SMCJ130C	144.00	176.00	1	1	130.0	6.49	231.0
SMCJ130A	SMCJ130CA	144.00	159.00	1	1	130.0	7.18	209.0
SMCJ140	SMCJ140C	155.68	190.40	1	1	140.0	5.99	250.6
SMCJ140A	SMCJ140CA	155.00	171.00	1	1	140.0	6.61	226.8
SMCJ150	SMCJ150C	167.00	204.00	1	1	150.0	5.60	268.0
SMCJ150A	SMCJ150CA	167.00	185.00	1	1	150.0	6.17	243.0
SMCJ160	SMCJ160C	178.00	218.00	1	1	160.0	5.23	287.0
SMCJ160A	SMCJ160CA	178.00	197.00	1	1	160.0	5.79	259.0
SMCJ170	SMCJ170C	189.00	231.00	1	1	170.0	4.93	304.0
SMCJ170A	SMCJ170CA	189.00	209.00	1	1	170.0	5.45	275.0
SMCJ180	SMCJ180C	200.16	244.80	1	1	180.0	4.66	322.2
SMCJ180A	SMCJ180CA	200.00	220.00	1	1	180.0	5.14	291.6
SMCJ190	SMCJ190C	211.28	258.40	1	1	190.0	4.41	340.1
SMCJ190A	SMCJ190CA	211.00	232.00	1	1	190.0	4.87	307.8
SMCJ200A	SMCJ200CA	224.00	247.00	1	1	200.0	4.60	324.0
SMCJ220A	SMCJ220CA	246.00	272.00	1	1	220.0	4.20	356.0
SMCJ250A	SMCJ250CA	279.00	309.00	1	1	250.0	3.70	405.0
SMCJ300A	SMCJ300CA	335.00	371.00	1	1	300.0	3.10	486.0
SMCJ350A	SMCJ350CA	391.00	432.00	1	1	350.0	2.60	567.0
SMCJ400A	SMCJ400CA	447.00	494.00	1	1	400.0	2.30	648.0
SMCJ440A	SMCJ440CA	492.00	543.00	1	1	440.0	2.10	713.0

■ **TYPICAL CHARACTERISTICS** ($T_A=25^\circ\text{C}$, unless otherwise specified)

Fig 1. Pulse Derating Curve

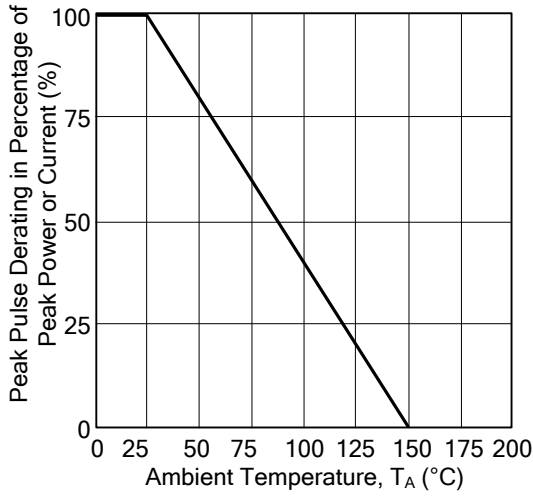


Fig 2. Maximum Non-Repetitive Surge Current

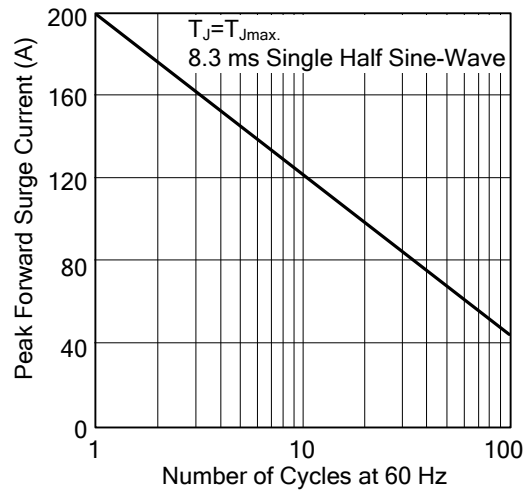


Fig 3. Steady State Power Derating Curve

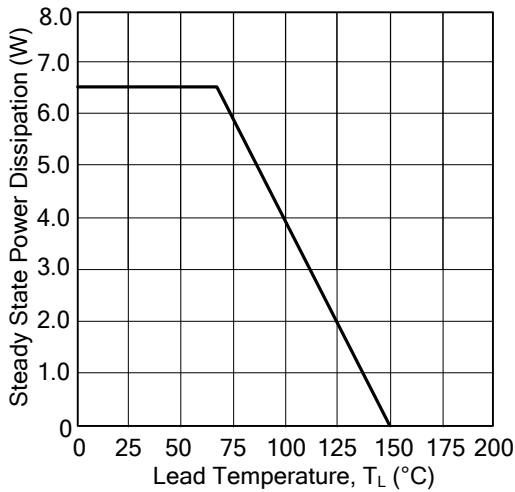


Fig 4. Peak Pulse Power Rating Curve


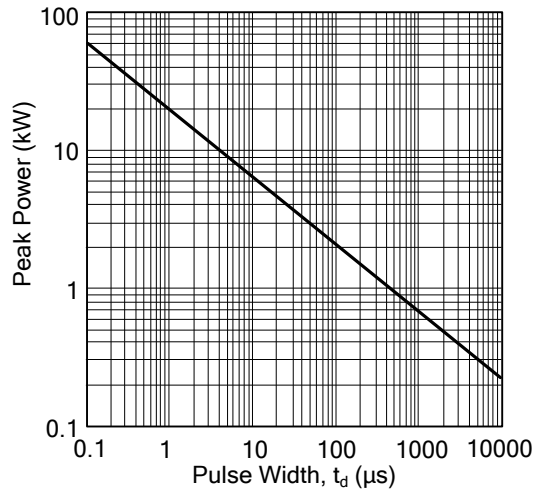


Fig 5. Pulse Waveform

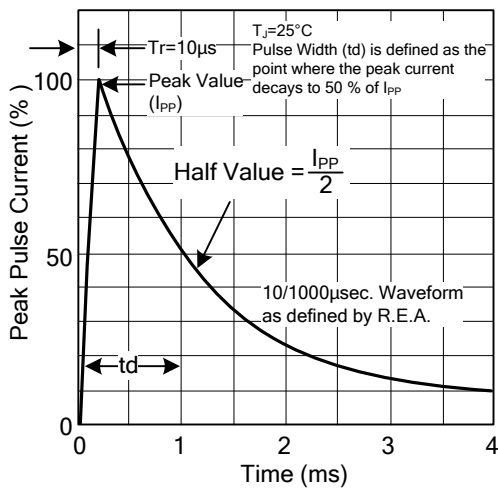

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.