



SB260

DIODE

2.0A SCHOTTKY BARRIER RECTIFIER


DESCRIPTION

The UTC **SB260** is a 2.0A schottky barrier rectifier, it uses UTC's advanced technology to provide customers with low forward voltage drop, high current capability and high efficiency, etc.

The UTC **SB260** is suitable for use in free wheeling, high frequency inverters, low voltage and polarity protection applications.

FEATURES

- * Low forward voltage drop
- * High current capability
- * High surge capability
- * Low power loss
- * High efficiency

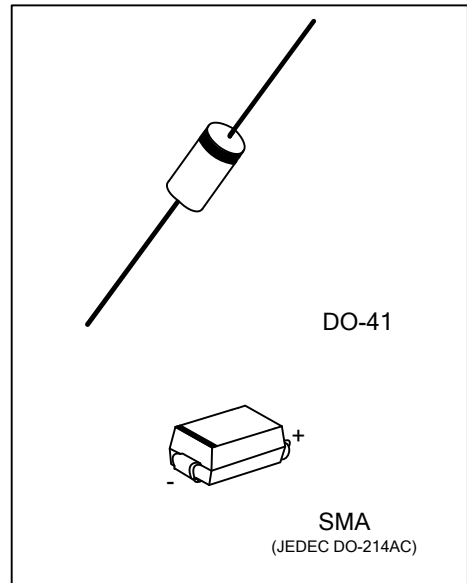

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment		Packing
Lead Free	Halogen Free		1	2	
SB260L-SMA-R	SB260G-SMA-R	SMA	K	A	Tape Reel
SB260L-Z41-B	SB260G-Z41-B	DO-41	K	A	Tape Box
SB260L-Z41-R	SB260G-Z41-R	DO-41	K	A	Tape Reel

Note: Pin Assignment: A: Anode K: Cathode

<p>SB260G-SMA-R</p>	<p>(1) B: Tape Box, R: Tape Reel (2) SMA: SMA, Z41: DO-41 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
---------------------	---

MARKING

SMA	DO-41

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitance load, derate current by 20%.

PARAMETER	SYMBOL	RATINGS	UNIT
DC Blocking Voltage	V_R	60	V
Working Peak Reverse Voltage	V_{RWM}	60	V
Repetitive Peak Reverse Voltage	V_{RRM}	60	V
RMS Reverse Voltage	$V_{R(RMS)}$	42	V
Average Rectified Output Current ($T_A=25^{\circ}\text{C}$) (Note 1)	I_O	2.0	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	I_{FSM}	50	A
Operating Junction Temperature	T_J	-55~+125	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55~+125	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	50	$^{\circ}\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$ unless otherwise specified.)

Single phase, half wave, 60Hz, resistive or inductive load.




For capacitance load, derate current by 20%.

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Forward Voltage Drop	V_{FM}	$I_F=2.0\text{A}$			0.70	V
Peak Reverse Current at Rated DC Blocking Voltage	I_{RM}	$T_A=25^{\circ}\text{C}$			0.5	mA
Junction Capacitance (Note 2)	C_J			190		pF

Notes: 1. Pulse width \leq 300 μs , duty cycle \leq 2%.

2. Measured at 1.0MHz and applied reverse voltage of 5.0V DC.

■ TYPICAL CHARACTERISTICS

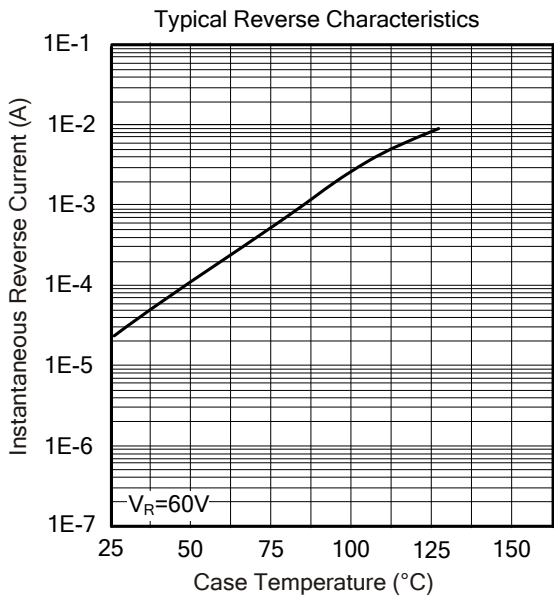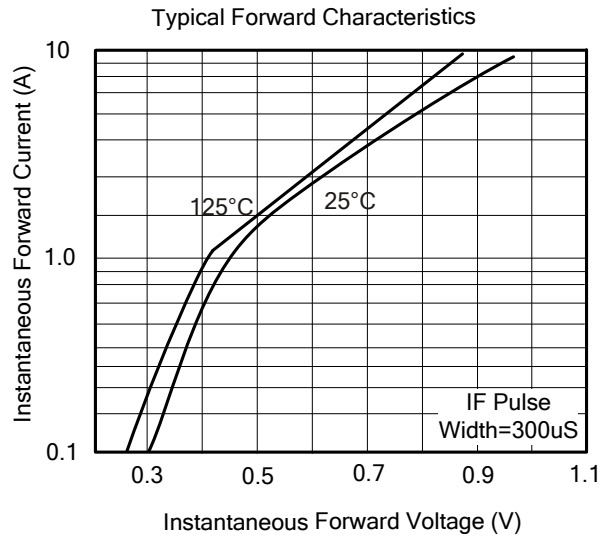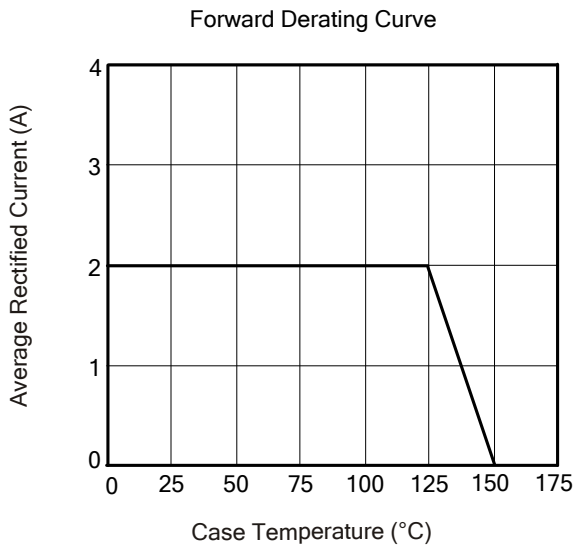

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.