



10A SCHOTTKY BARRIER RECTIFIER

DESCRIPTION



The UTC **MBR10100** is a 10A schottky barrier rectifier, it uses UTC's advanced technology to provide the customers with high surge capability, high efficiency, high current capability, low power loss and low forward voltage drop, etc.

The UTC **MBR10100** is suitable for free wheeling and polarity protection, etc.

FEATURES

- * Low Reverse Current
- * Low Stored Charge, Majority Carrier Conduction
- * Low Power Loss/High Efficiency
- * Highly Stable Oxide Passivated Junction

SYMBOL

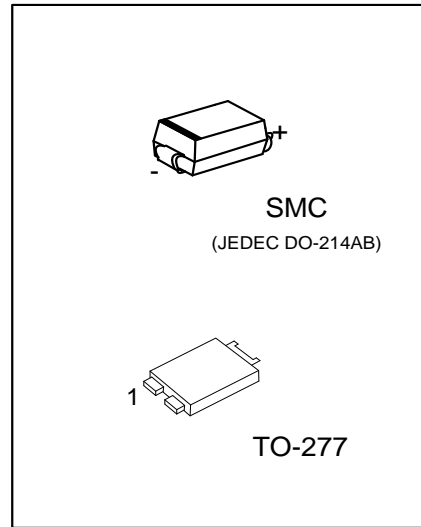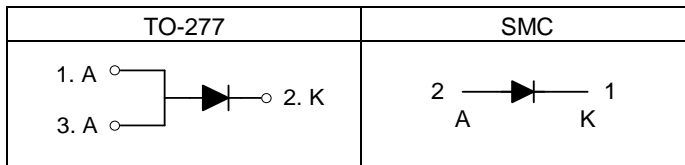



ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
MBR10100L-T27-R	MBR10100G-T27-R	TO-277	A	K	A	Tape Reel
MBR10100L-SMC-R	MBR10100G-SMC-R	SMC	K	A	-	Tape Reel

Note: Pin Assignment: A: Anode K: Common Cathode

MBR10100G-T27-R		
(1) Packing Type	(1) R: Tape Reel	
(2) Package Type	(2) T27: TO-227, SMC: SMC	
(3) Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free	

■ **MARKING**

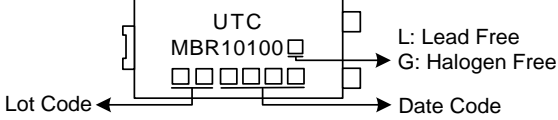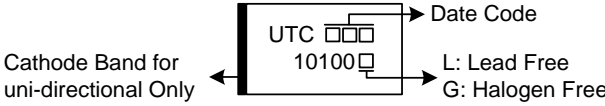PACKAGE	MARKING
TO-277	 <p>The diagram shows a TO-277 package with the following markings: "UTC" at the top, "MBR10100" in the center, a "Lot Code" (represented by five small squares) on the left, and a "Date Code" (represented by four small squares) on the right. To the right of the package, the text "L: Lead Free" and "G: Halogen Free" is listed.</p>
SMC	 <p>The diagram shows an SMC package with the following markings: "UTC" at the top, "10100" in the center, a "Cathode Band for uni-directional Only" (represented by a thick vertical bar) on the left, and a "Date Code" (represented by four small squares) on the right. To the right of the package, the text "L: Lead Free" and "G: Halogen Free" is listed.</p>

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

PARAMETER	SYMBOL	RATINGS	UNIT
Working Peak Reverse Voltage	V _{RWM}	100	V
Repetitive Peak Reverse Voltage	V _{RRM}	100	V
Maximum RMS Reverse Voltage	V _{RMS}	70	V
DC Blocking Voltage	V _R	100	V
Average Rectified Output Current (T _A =105°C)	I _O	10	A
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load	I _{FSM}	150	A
Junction Temperature	T _J	-55 ~ +150	°C
Storage Temperature	T _{STG}	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-277	73	°C/W
	SMC	90	°C/W

Note: Mounted on an FR4 PCB, single-sided copper, with 100 cm² copper pad area.

■ ELECTRICAL CHARACTERISTICS (Note 2)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Instantaneous Forward Voltage Drop	V _F	I _F =10A, T _C =25°C			0.80	V
		I _F =10A, T _C =125°C			0.75	
Instantaneous Reverse Current	I _R	Rated DC Voltage, T _C =25°C			50	μA
		Rated DC Voltage, T _C =125°C			15	mA

Notes: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC

2. Pulse Test: Pulse Width = 300μs, Duty Cycle ≤ 2.0%

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.