

11NM70

Power MOSFET

11A, 700V N-CHANNEL SUPER-JUNCTION MOSFET



■ DESCRIPTION

The **UTC 11NM70** is a Super Junction MOSFET Structure and is designed to have better characteristics, such as fast switching time, low gate charge, low on-state resistance and a high rugged avalanche characteristics. This power MOSFET is usually used at AC-DC converters for power applications.

■ FEATURES

- * $R_{DS(ON)} \leq 0.58 \Omega$ @ $V_{GS}=10V$, $I_D=5.5A$
- * By using Super Junction Structure
- * Fast Switching
- * With 100% Avalanche Tested


■ SYMBOL

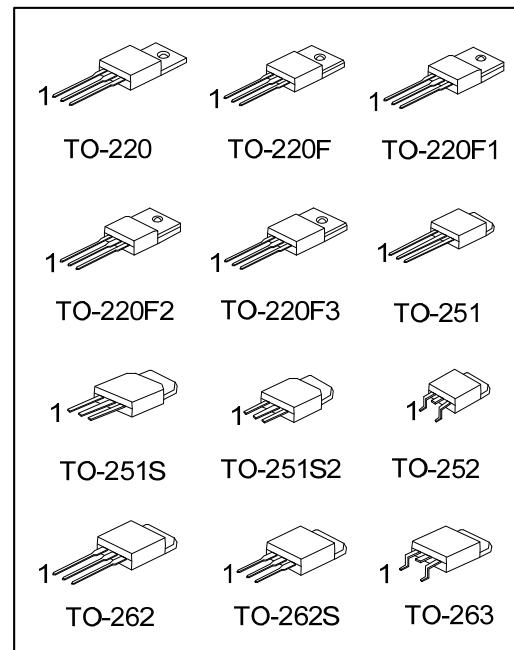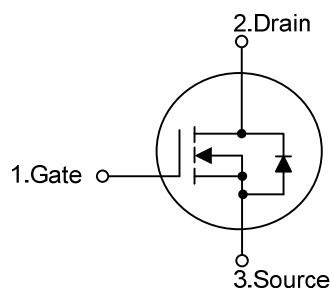


■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
11NM70L-TA3-T	11NM70G-TA3-T	TO-220	G	D	S	Tube
11NM70L-TF1-T	11NM70G-TF1-T	TO-220F1	G	D	S	Tube
11NM70L-TF2-T	11NM70G-TF2-T	TO-220F2	G	D	S	Tube
11NM70L-TF3-T	11NM70G-TF3-T	TO-220F	G	D	S	Tube
11NM70L-TF3T-T	11NM70G-TF3T-T	TO-220F3	G	D	S	Tube
11NM70L-TM3-T	11NM70G-TM3-T	TO-251	G	D	S	Tube
11NM70L-TMS-T	11NM70G-TMS-T	TO-251S	G	D	S	Tube
11NM70L-TMS2-T	11NM70G-TMS2-T	TO-251S2	G	D	S	Tube
11NM70L-TN3-R	11NM70G-TN3-R	TO-252	G	D	S	Tape Reel
11NM70L-T2Q-T	11NM70G-T2Q-T	TO-262	G	D	S	Tube
11NM70L-T2S-T	11NM70G-T2S-T	TO-262S	G	D	S	Tube
11NM70L-TQ2-T	11NM70G-TQ2-T	TO-263	G	D	S	Tube
11NM70L-TQ2-R	11NM70G-TQ2-R	TO-263	G	D	S	Tape Reel

Note: Pin Assignment: G: Gate D: Drain S: Source

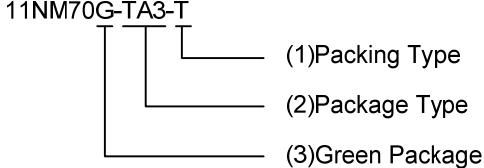 (1) T: Tube, R: Tape Reel (2) TA3: TO-220, TF1: TO-220F1, TF2: TO-220F2 TF3: TO-220F, TF3T: TO-220F3, TM3: TO-251, TMS: TO-251S, TMS2: TO-251S2, TN3: TO-252, T2Q: TO-262, T2S: TO-262S, TQ2: TO-263 (3) G: Halogen Free and Lead Free, L: Lead Free

■ MARKING

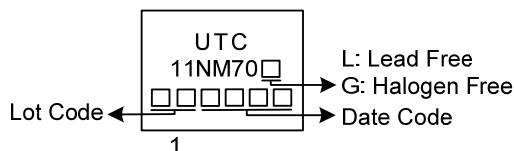

■ ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain to Source Voltage		V_{DSS}	700	V
Gate to Source Voltage		V_{GSS}	± 30	V
Continuous Drain Current	Continuous	I_D	11	A
Pulsed Drain Current	Pulsed (Note 2)	I_{DM}	22	A
Avalanche Energy	Single Pulsed (Note 3)	E_{AS}	166	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	3.5	V/ns
Power Dissipation	TO-220/TO-262	P_D	85	W
	TO-262S/TO-263			
	TO-220F/TO-220F1			
	TO-220F2/TO-220F3			
	TO-251/TO-251S			
			70	W
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating : Pulse width limited by maximum junction temperature.

3. L=65mH, $I_{AS}=2.2\text{A}$, $V_{DD}=50\text{V}$, $R_G=25\Omega$, Starting $T_J=25^\circ\text{C}$.

4. $I_{SD} \leq 11\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DSS}$, Starting $T_J=25^\circ\text{C}$.

■ THERMAL DATA

PARAMETER		SYMBOL	RATINGS	UNIT
Junction to Ambient	TO-220/TO-220F TO-220F1/TO-220F2 TO-220F3/TO-262 TO-262S/TO-263	θ_{JA}	62.5	$^\circ\text{C/W}$
	TO-251/TO-251S TO-251S2/TO-252		110	$^\circ\text{C/W}$
Junction to Case	TO-220/TO-262 TO-262S/TO-263	θ_{JC}	1.47	$^\circ\text{C/W}$
	TO-220F/TO-220F1 TO-220F2/TO-220F3		4.16	$^\circ\text{C/W}$
	TO-251/TO-251S TO-251S2/TO-252		1.78 (Note)	$^\circ\text{C/W}$

Note: Device mounted on FR-4 substrate PC board, 2oz copper, with 1inch square copper plate.


■ ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}}=0\text{V}, I_{\text{D}}=250\mu\text{A}$	700			V
Drain-Source Leakage Current	I_{DSS}	$V_{\text{DS}}=700\text{V}, V_{\text{GS}}=0\text{V}$			10	μA
Gate-Source Leakage Current	I_{GSS}	$V_{\text{DS}}=0\text{V}, V_{\text{GS}}=\pm30\text{V}$			±100	nA
ON CHARACTERISTICS						
Gate Threshold Voltage	$V_{\text{GS}(\text{TH})}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=250\mu\text{A}$	2.5		4.5	V
Drain-Source On-State Resistance	$R_{\text{DS}(\text{ON})}$	$V_{\text{GS}}=10\text{V}, I_{\text{D}}=5.5\text{A}$			0.58	Ω
DYNAMIC PARAMETERS						
Input Capacitance	C_{ISS}	$V_{\text{DS}}=25\text{V}, V_{\text{GS}}=0\text{V}, f=1.0\text{MHz}$		750		pF
Output Capacitance	C_{OSS}			450		pF
Reverse Transfer Capacitance	C_{RSS}			40		pF
SWITCHING PARAMETERS						
Total Gate Charge (Note 1)	Q_G	$V_{\text{DS}}=560\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=11\text{A}, I_{\text{G}}=1\text{mA}$ (Note 1, 2)		36	50	nC
Gate to Source Charge	Q_{GS}			10		nC
Gate to Drain Charge	Q_{GD}			15		nC
Turn-ON Delay Time (Note 1)	$t_{\text{D}(\text{ON})}$	$V_{\text{DD}}=100\text{V}, V_{\text{GS}}=10\text{V}, I_{\text{D}}=11\text{A}, R_{\text{G}}=25\Omega$ (Note 1, 2)		14		ns
Rise Time	t_R			24		ns
Turn-OFF Delay Time	$t_{\text{D}(\text{OFF})}$			80		ns
Fall-Time	t_F			39		ns
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Maximum Body-Diode Continuous Current	I_S				11	A
Maximum Body-Diode Pulsed Current	I_{SM}				22	A
Drain-Source Diode Forward Voltage (Note 1)	V_{SD}	$I_S=11\text{A}, V_{\text{GS}}=0\text{V}$			1.4	V
Body Diode Reverse Recovery Time (Note 1)	t_{rr}	$I_S=11\text{A}, V_{\text{GS}}=0\text{V}$		370		ns
Body Diode Reverse Recovery Charge	Q_{rr}	$dI_F/dt=100\text{A}/\mu\text{s}$			11.08	μC


Notes: 1. Pulse Test : Pulse width $\leq 300\mu\text{s}$, Duty cycle $\leq 2\%$.

2. Essentially independent of operating temperature.

■ TEST CIRCUITS AND WAVEFORMS


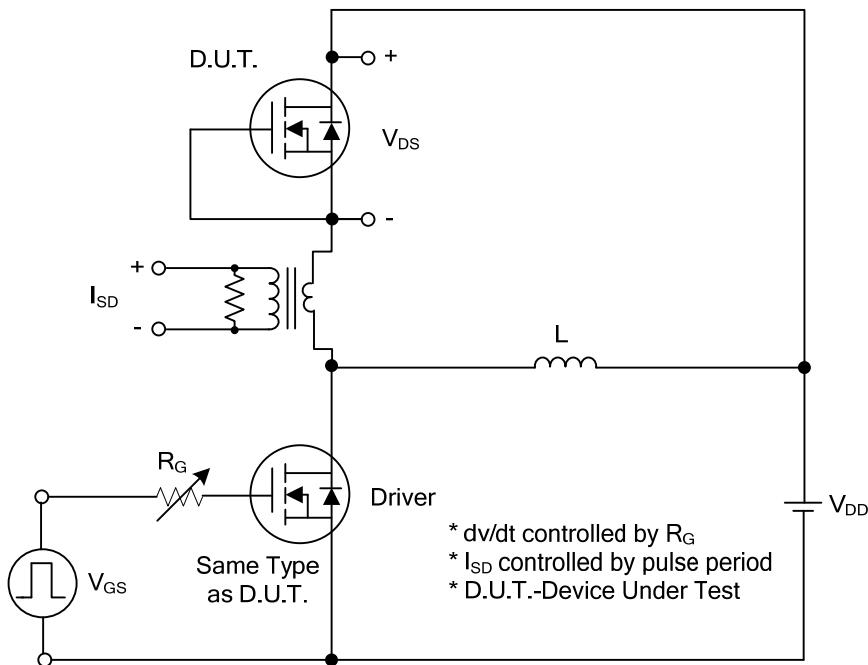


Peak Diode Recovery dv/dt Test Circuit

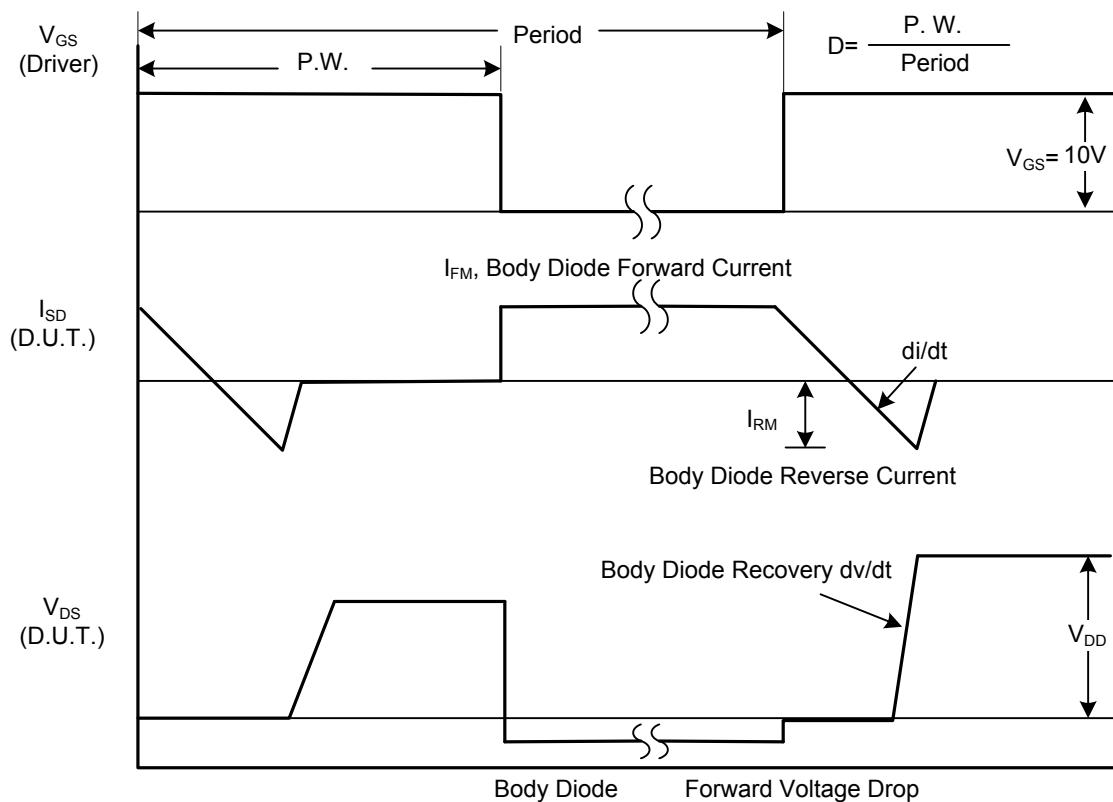



Peak Diode Recovery dv/dt Waveforms

■ TEST CIRCUITS AND WAVEFORMS

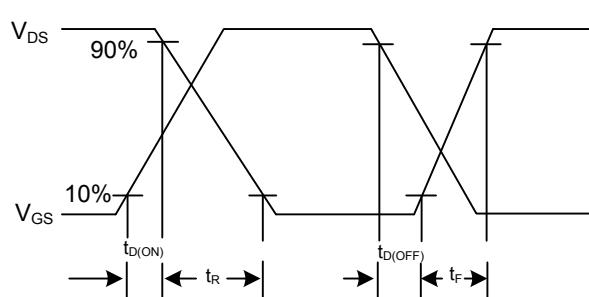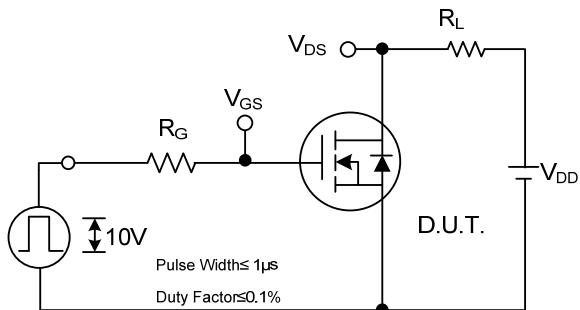



Switching Test Circuit

Switching Waveforms

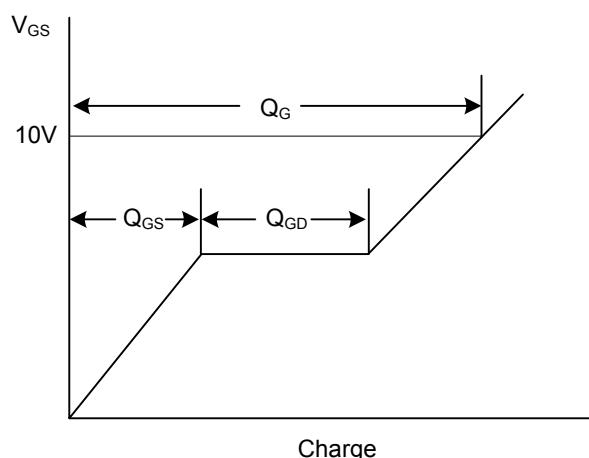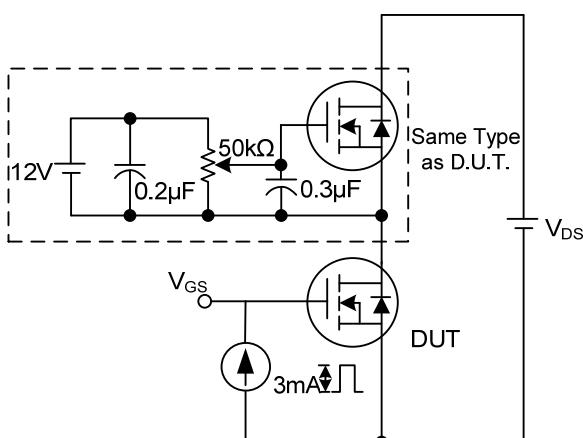

Gate Charge Test Circuit







Gate Charge Waveform

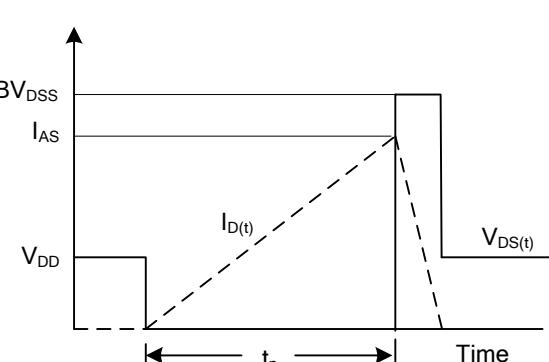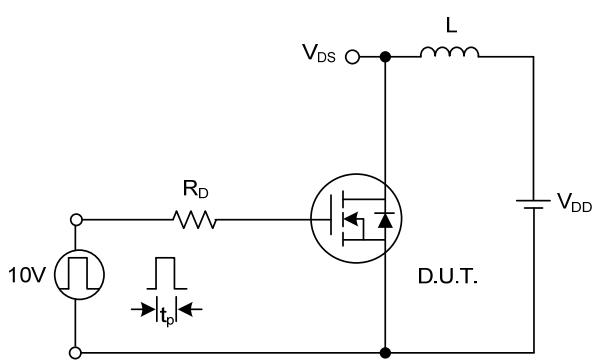







Unclamped Inductive Switching Test Circuit

Unclamped Inductive Switching Waveforms


■ TYPICAL CHARACTERISTICS

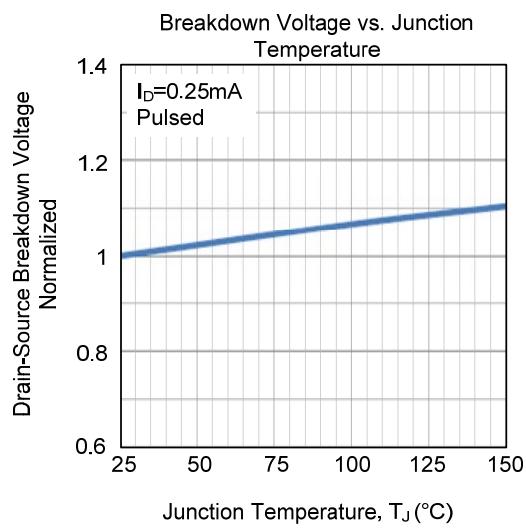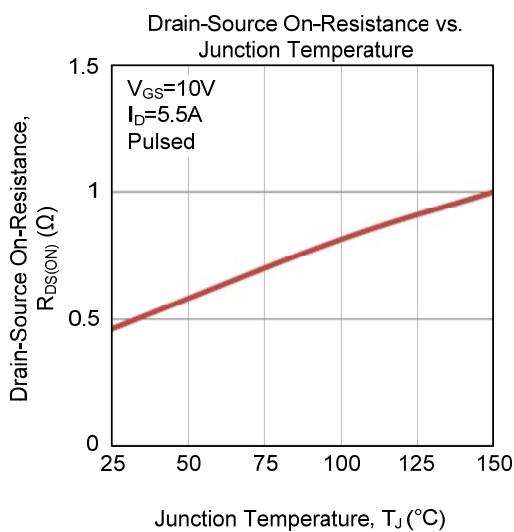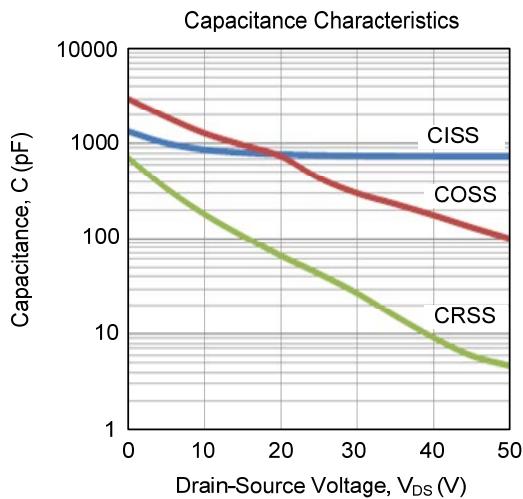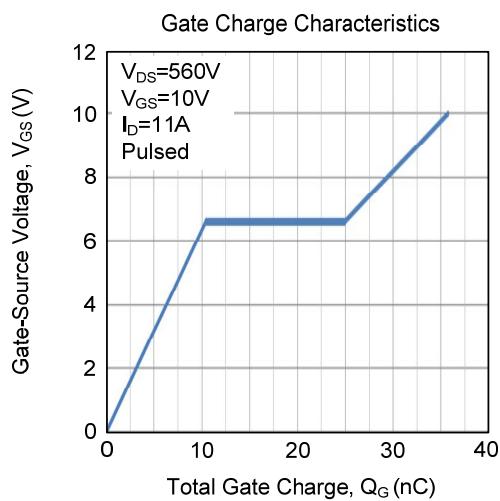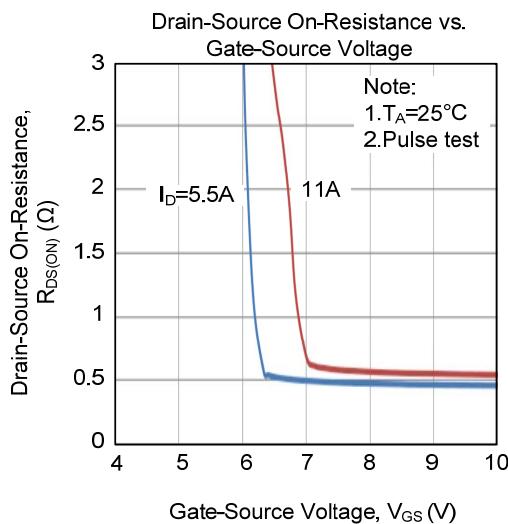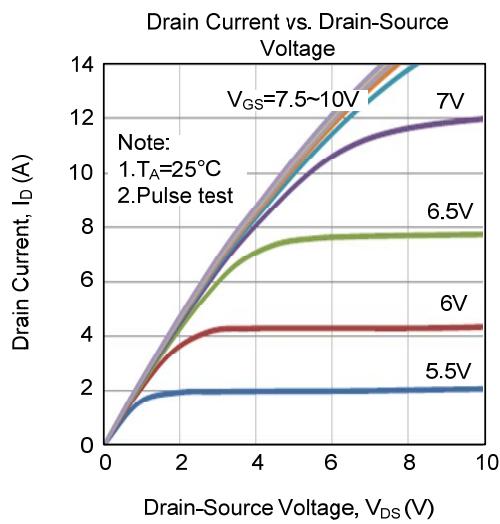

■ TYPICAL CHARACTERISTICS (Cont.)

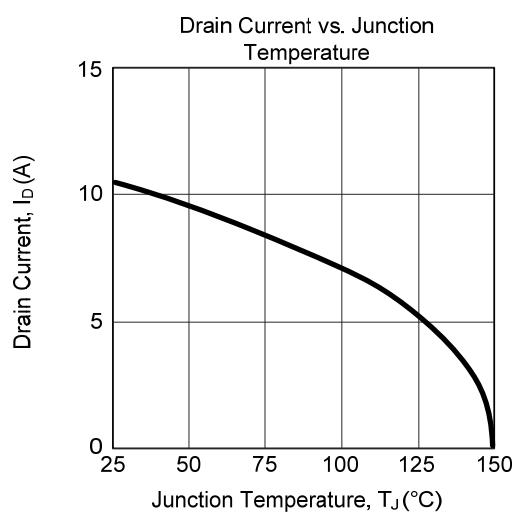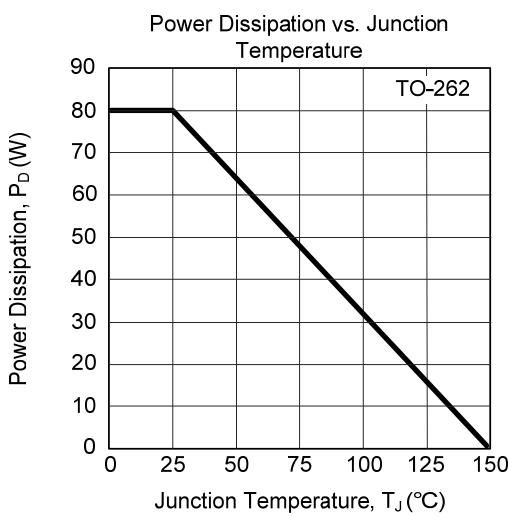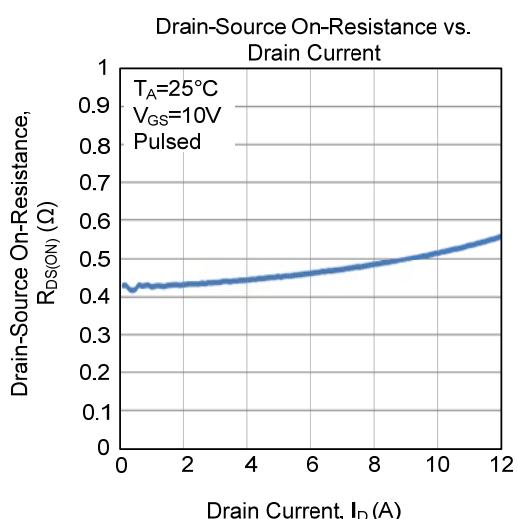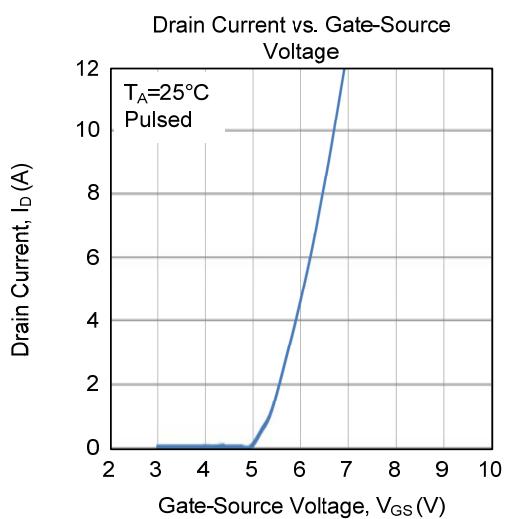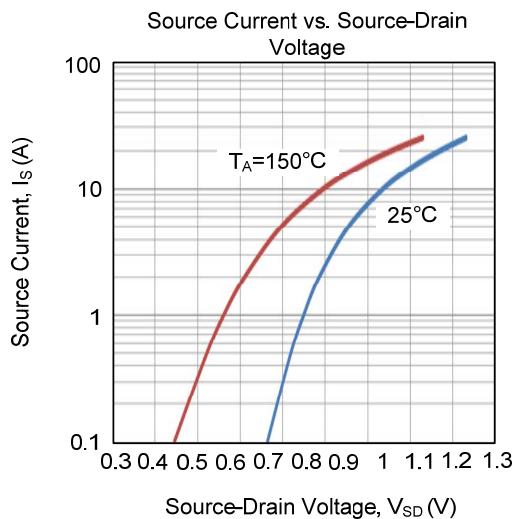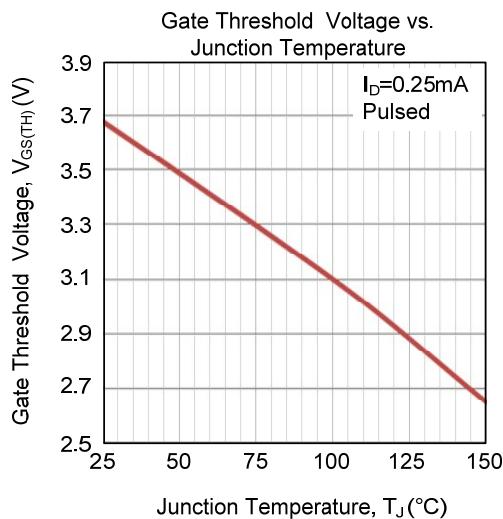

- TYPICAL CHARACTERISTICS (Cont.)

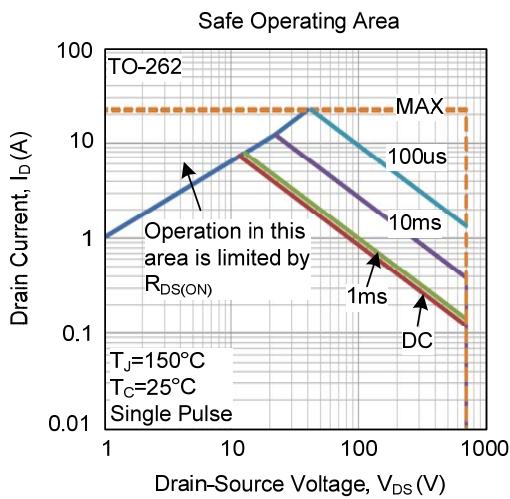

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.