



## UF730K-TC

Power MOSFET


### 5.5A, 400V N-CHANNEL POWER MOSFET

#### DESCRIPTION


The N-Channel enhancement mode silicon gate power MOSFET is designed for high voltage, high speed power switching applications such as switching regulators, switching converters, solenoid, motor drivers, relay drivers.

#### FEATURES

- \*  $R_{DS(ON)} \leq 1.1 \Omega$  @  $V_{GS}=10V, I_D=3.0A$
- \* Avalanche Energy Specified
- \* Fast Switching Capability
- \* Linear Transfer Characteristics
- \* High Input Impedance

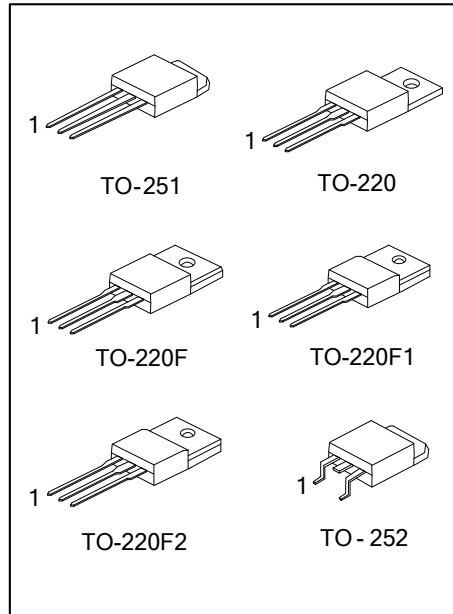

#### SYMBOL




#### ORDERING INFORMATION

| Ordering Number |               | Package  | Pin Assignment |   |   | Packing   |
|-----------------|---------------|----------|----------------|---|---|-----------|
| Lead Free       | Halogen Free  |          | 1              | 2 | 3 |           |
| UF730KL-TA3-T   | UF730KG-TA3-T | TO-220   | G              | D | S | Tube      |
| UF730KL-TF1-T   | UF730KG-TF1-T | TO-220F1 | G              | D | S | Tube      |
| UF730KL-TF2-T   | UF730KG-TF2-T | TO-220F2 | G              | D | S | Tube      |
| UF730KL-TF3-T   | UF730KG-TF3-T | TO-220F  | G              | D | S | Tube      |
| UF730KL-TM3-T   | UF730KG-TM3-T | TO-251   | G              | D | S | Tube      |
| UF730KL-TN3-R   | UF730KG-TN3-R | TO-252   | G              | D | S | Tape Reel |

Note: Pin Assignment: G: Gate D: Drain S: Source

|                      |  |
|----------------------|--|
| <p>UF730KG-TA3-T</p> | <p>(1) T: Tube, R: Tape Reel</p> <p>(2) TA3: TO-220, TF3: TO-220F, TF1: TO-220F1, TF2: TO-220F2, TM3: TO-251, TN3: TO-252</p> <p>(3) G: Halogen Free and Lead Free, L: Lead Free</p> |
|----------------------|--|

■ MARKING

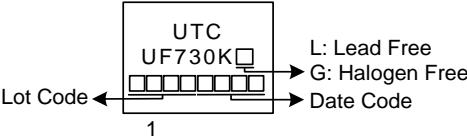

### ■ ABSOLUTE MAXIMUM RATINGS (T<sub>c</sub>=25°C, unless otherwise specified)

| PARAMETER                          |                        | SYMBOL           | RATINGS    | UNIT |
|------------------------------------|------------------------|------------------|------------|------|
| Drain-Source Voltage               |                        | V <sub>DSS</sub> | 400        | V    |
| Gate-Source Voltage                |                        | V <sub>GSS</sub> | ±20        | V    |
| Drain Current                      | Continuous             | I <sub>D</sub>   | 5.5        | A    |
|                                    | Pulsed (Note 2)        | I <sub>DM</sub>  | 22         | A    |
| Avalanche Current (Note 2)         |                        | I <sub>AR</sub>  | 4.6        | A    |
| Avalanche Energy                   | Single Pulsed (Note 3) | E <sub>AS</sub>  | 106        | mJ   |
| Peak Diode Recovery dv/dt (Note 4) |                        | dv/dt            | 2.0        | V/ns |
| Power Dissipation                  | TO-220                 | P <sub>D</sub>   | 73         | W    |
|                                    | TO-220F/TO-220F1       |                  | 38         | W    |
|                                    | TO-220F2               |                  | 40         | W    |
|                                    | TO-251/TO-252          |                  | 48         | W    |
| Junction Temperature               |                        | T <sub>J</sub>   | +150       | °C   |
| Storage Temperature                |                        | T <sub>STG</sub> | -55 ~ +150 | °C   |

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. Repetitive Rating: Pulse width limited by maximum junction temperature.

3. L = 10mH, I<sub>AS</sub> = 4.6A, V<sub>DD</sub> = 50V, R<sub>G</sub> = 25Ω, Starting T<sub>J</sub> = 25°C

4. I<sub>SD</sub> ≤ 5.5A, di/dt ≤ 200A/μs, V<sub>DD</sub> ≤ BV<sub>DSS</sub>, Starting T<sub>J</sub> = 25°C

### ■ THERMAL DATA

| PARAMETER           |                   | SYMBOL          | RATING | UNIT |
|---------------------|-------------------|-----------------|--------|------|
| Junction to Ambient | TO-220/TO-220F    | θ <sub>JA</sub> | 62.5   | °C/W |
|                     | TO-220F1/TO-220F2 |                 |        |      |
|                     | TO-251/TO-252     |                 | 110    |      |
| Junction to Case    | TO-220            | θ <sub>JC</sub> | 1.71   | °C/W |
|                     | TO-220F/TO-220F1  |                 | 3.31   |      |
|                     | TO-220F2          |                 | 3.125  |      |
|                     | TO-251/TO-252     |                 | 2.6    |      |

■ **ELECTRICAL CHARACTERISTICS** ( $T_J=25^\circ\text{C}$ , unless otherwise specified)

| PARAMETER  | SYMBOL       | TEST CONDITIONS  | MIN | TYP | MAX       | UNIT     |
|--|--------------|--|-----|-----|-----------|----------|
| <b>OFF CHARACTERISTICS</b>                             |              |  |     |     |           |          |
| Drain-Source Breakdown Voltage                         | $BV_{DSS}$   | $V_{GS}=0V, I_D=250\mu A$  | 400 |     |           | V        |
| Drain-Source Leakage Current                           | $I_{DSS}$    | $V_{DS}=\text{Rated } BV_{DSS}, V_{GS}=0V$                       |     |     | 25        | $\mu A$  |
| Gate-Source Leakage Current                            | $I_{GSS}$    | $V_{GS}=\pm 20V$   |     |     | $\pm 100$ | nA       |
| <b>ON CHARACTERISTICS</b>                              |              |  |     |     |           |          |
| Gate Threshold Voltage                                 | $V_{GS(TH)}$ | $V_{DS}=V_{GS}, I_D=250\mu A$                                    | 2.0 |     | 4.0       | V        |
| Static Drain-Source On-State Resistance                | $R_{DS(ON)}$ | $V_{GS}=10V, I_D=3.0A$   |     |     | 1.1       | $\Omega$ |
| <b>DYNAMIC CHARACTERISTICS</b>                         |              |  |     |     |           |          |
| Input Capacitance                                      | $C_{ISS}$    | $V_{GS}=0V, V_{DS}=25V, f=1.0\text{MHz}$                         |     | 250 |           | pF       |
| Output Capacitance                                     | $C_{OSS}$    |  |     | 83  |           | pF       |
| Reverse Transfer Capacitance                           | $C_{RSS}$    |  |     | 7.0 |           | pF       |
| <b>SWITCHING CHARACTERISTICS</b>                       |              |  |     |     |           |          |
| Total Gate Charge (Note 1)                             | $Q_G$        | $V_{DS}=50V, V_{GS}=10V, I_D=1.3A$<br>$I_G=100\mu A$ (Note1, 2)  |     | 44  |           | nC       |
| Gate to Source Charge                                  | $Q_{GS}$     |  |     | 3.4 |           | nC       |
| Gate to Drain Charge                                   | $Q_{GD}$     |  |     | 3.4 |           | nC       |
| Turn-ON Delay Time (Note 1)                            | $t_{D(ON)}$  | $V_{DS}=30V, V_{GS}=10V, I_D=0.5A,$<br>$R_G=25\Omega$ (Note1, 2) |     | 44  |           | ns       |
| Rise Time  | $t_R$        |  |     | 48  |           | ns       |
| Turn-OFF Delay Time                                    | $t_{D(OFF)}$ |  |     | 268 |           | ns       |
| Fall-Time  | $t_F$        |  |     | 83  |           | ns       |
| <b>SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS</b> |              |  |     |     |           |          |
| Maximum Body-Diode Continuous Current                  | $I_S$        |  |     |     | 5.5       | A        |
| Maximum Body-Diode Pulsed Current                      | $I_{SM}$     |  |     |     | 22        | A        |
| Drain-Source Diode Forward Voltage (Note 1)            | $V_{SD}$     | $I_S=5.5A, V_{GS}=0V$  |     |     | 1.4       | V        |
| Body Diode Reverse Recovery Time (Note 1)              | $t_{rr}$     | $I_S=5.5A, V_{GS}=0V$<br>$di_F/dt=100A/\mu s$                    |     | 220 |           | ns       |
| Body Diode Reverse Recovery Charge                     | $Q_{rr}$     |  |     |     | 1.0       |          |

Notes: 1. Pulse Test: Pulse width  $\leq 300\mu s$ , Duty cycle  $\leq 2\%$ .

2. Essentially independent of operating temperature.



## TEST CIRCUITS AND WAVEFORMS

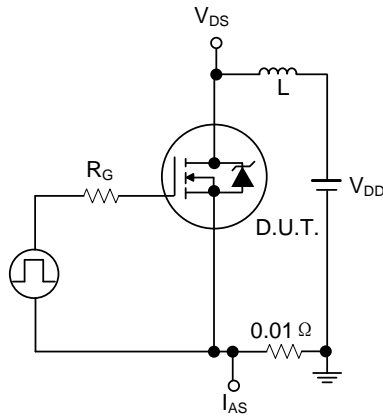


Figure 1A. Unclamped Energy Test Circuit

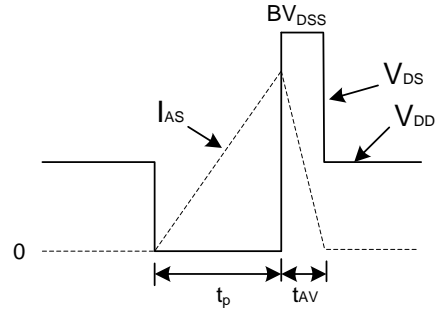


Figure 1B. Unclamped Energy Waveforms

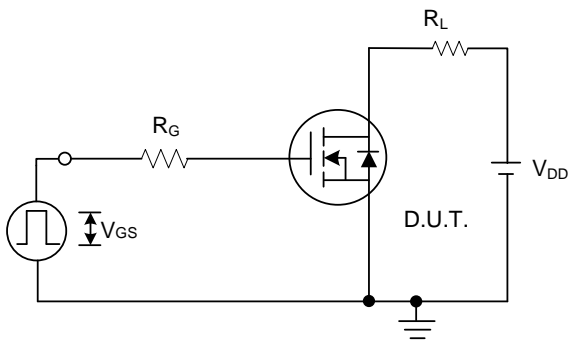


Figure 2A. Switching Time Test Circuit

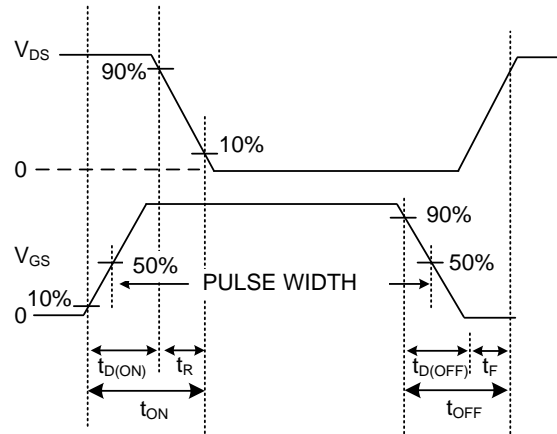


Figure 2B. Resistive Switching Waveforms

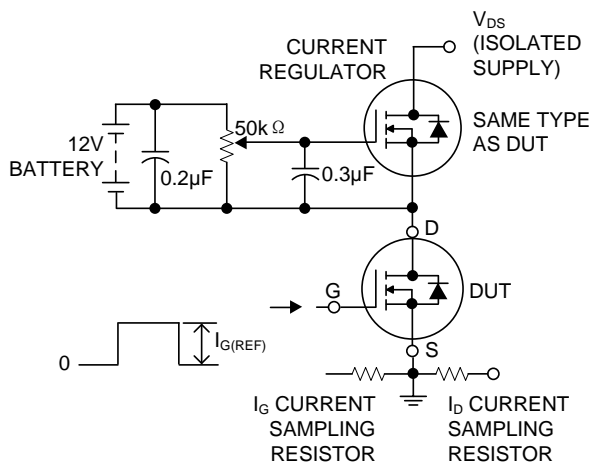


Figure 3A. Gate Charge Test Circuit

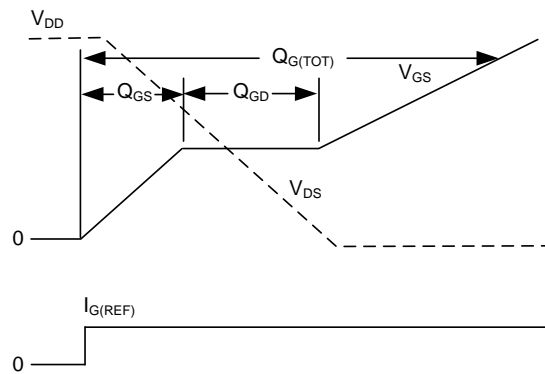


Figure 3B. Gate Charge Waveforms

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.