



U74CBT3251C


CMOS IC

1-OF-8 FET MULTIPLEXER/ DEMULTIPLEXER

■ DESCRIPTION

The **U74CBT3251C** is a 1-OF-8 high-speed TTL-compatible FET multiplexer / demultiplexer. The low on-state resistance of the switch allows connections to be made with minimal propagation delay.

When output enable (OE) is low, the **U74CBT3251C** is enabled. S0, S1, and S2 select one of the B outputs for the A-input data.



SOP-16

■ FEATURES


- * V_{CC} Operating Range From 4V to 5.5V
- * Bidirectional Data Flow, With minimal Propagation Delay
- * Low ON-State Resistance (R_{ON}) Characteristics ($R_{ON} = 4\Omega$ Typ.)
- * Low Power Consumption $I_{CC} = 3\mu A$ (Max.)

■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74CBT3251CL-S16-R	U74CBT3251CG-S16-R	SOP-16	Tape Reel

U74CBT3251CG-S16-R	(1)Packing Type (2)Package Type (3)Green Package	(1) R: Tape Reel (2) S16: SOP-16 (3) G: Halogen Free and Lead Free, L: Lead Free
--------------------	--	--

■ MARKING

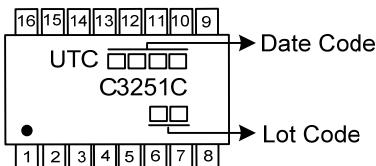


■ PIN CONFIGURATION

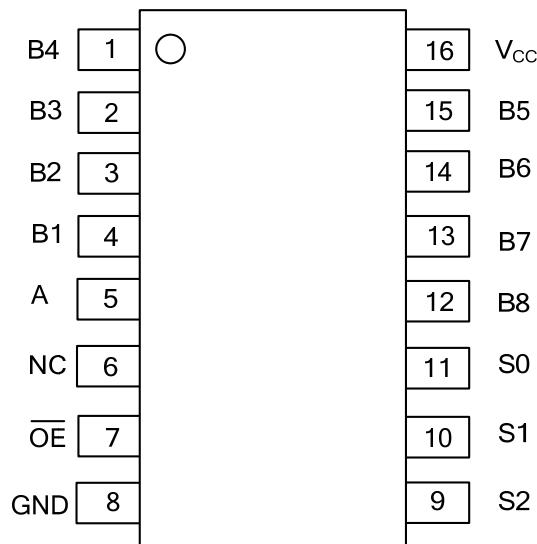

■ FUNCTION TABLE

INPUT				FUNCTION
OE	S2	S1	S0	
L	L	L	L	A port=B1 port
L	L	L	H	A port=B2 port
L	L	H	L	A port=B3 port
L	L	H	H	A port=B4 port
L	H	L	L	A port=B5 port
L	H	L	H	A port=B6 port
L	H	H	L	A port=B7 port
L	H	H	H	A port=B8 port
H	X	X	X	Disconnect

■ LOGIC DIAGRAM

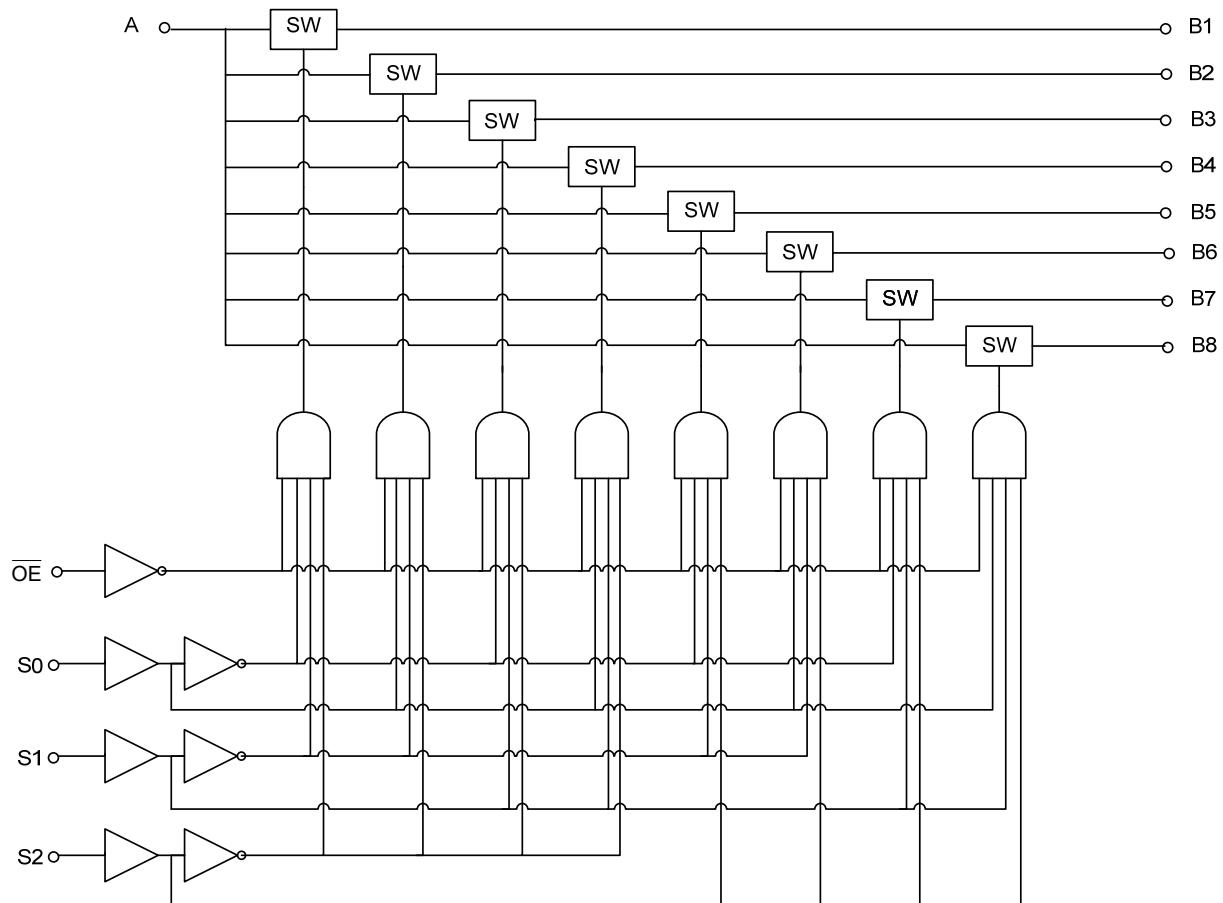

■ ABSOLUTE MAXIMUM RATING (Unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ 7	V
DC Input Voltage(see Note 2,3)	V_{IN}	-0.5 ~ 7	V
Control Input Clamp Current	I_{IK}	-50	mA
ON-State Switch Current	$I_{IN(SW)}$ $I_{OUT(SW)}$	± 128	mA
Storage Temperature	T_{STG}	-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. All voltages are with respect to ground.

3. The input and output voltage ratings may be exceeded if the input and output clamp-current ratings are observed.

■ RECOMMENDED OPERATING CONDITIONS (Unless otherwise specified)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}	4		5.5	V
High-Level Control Input Voltage	V_{IH}	2		5.5	V
Low-Level Control Input Voltage	V_{IL}	0		0.8	V
Data Input Voltage	V_{IN}	0		5.5	V
Data Output Voltage	V_{OUT}	0		5.5	V
Operating Temperature	T_A	-40		+125	°C

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	73	°C/W

■ ELECTRICAL CHARACTERISTICS (Unless otherwise specified)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Control Input Clamp Voltage	V_{IK}	$V_{CC}=4.5V$, $I_{IN} = -18mA$			-1.8	V
Data Inputs Clamp Voltage	V_{IKU}	$V_{CC}=5V$, $0mA > I_{IN} \geq -50mA$ GND, Switch OFF			-2	V
Output OFF-State Current	I_{OZ}	$V_{CC}=5.5V$, $V_{OUT}=0$ to $5.5V$, $V_{IN}=0$ $V_{IN}=V_{CC}$ or GND, Switch OFF			± 10	μA
Power OFF Leakage Current	I_{OFF}	$V_{CC}=0$, $V_O=0$ to $5.5V$, $V_{IN}=0$			10	μA
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=5.5V$, $V_{IN}=V_{CC}$ or GND			± 1	μA
Quiescent Supply Current	I_{CC}	$V_{CC}=5.5V$, $I_{IN}/I_{OUT}=0$ $V_{IN}=V_{CC}$ or GND, Switch ON or OFF			3	μA
Additional Quiescent Supply Current	ΔI_{CC}	$V_{CC}=5.5V$, One input at $3.4V$, Other inputs at V_{CC} or GND			2.5	mA
Control Input Capacitance	C_{IN}	$V_{IN}=3V$ or 0		3.5		pF
A Port Input Capacitance	$C_{IO(OFF)}$	$V_{CC}=5V$, $V_{IN}/V_{OUT}=3V$ or 0		17.5		pF
B Port Input Capacitance		$V_{IN}=V_{CC}$ or GND, Switch OFF		5.5		pF
Port Input Capacitance	$C_{IO(ON)}$	$V_{I/O}=3V$ or 0, $V_{IN}=V_{CC}$ or 0, Switch ON		26		pF
ON-Resistance	R_{ON}	$V_{CC}=4V$, $V_{IN}=2.4V$, $I_{OUT}=-15mA$		13	18	Ω
		$V_{CC}=4.5V$, $V_{IN}=0$	$I_{OUT}=64mA$	4	6	Ω
			$I_{OUT}=30mA$	4	6	Ω
		$V_{CC}=4.5V$, $V_{IN}=2.4V$	$I_{OUT}=-15mA$	8	12	Ω

■ SWITCHING CHARACTERISTICS ($C_L=50\text{pF}$, $R_L=500\Omega$; see TEST CIRCUIT AND WAVEFORMS)



PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT	
From input (A or B) to output (B or A) (Note)	t_{pd}	$V_{CC}=4V$			0.24	ns	
		$V_{CC}=5V\pm0.5V$			0.15	ns	
From input S to output A	$t_{pd(s)}$	$V_{CC}=4V$			9.6	ns	
		$V_{CC}=5V\pm0.5V$	1.5		5.5	ns	
From input S to output B	t_{en}	$V_{CC}=4V$			7.6	ns	
		$V_{CC}=5V\pm0.5V$	1.5		8.6	ns	
From input \overline{OE} to output (A or B)		$V_{CC}=4V$			9.4	ns	
		$V_{CC}=5V\pm0.5V$	1.5		9.0	ns	
From input S to output B	t_{dis}	$V_{CC}=4V$			6.8	ns	
		$V_{CC}=5V\pm0.5V$	1.5		6.4	ns	
From input \overline{OE} to output (A or B)		$V_{CC}=4V$			6.0	ns	
		$V_{CC}=5V\pm0.5V$	1.5		6.2	ns	

Note: The propagation delay is the calculated RC time constant of the typical ON-state resistance of the switch and the specified load capacitance, when driven by an ideal voltage source (zero output impedance).

■ TEST CIRCUIT AND WAVEFORMS

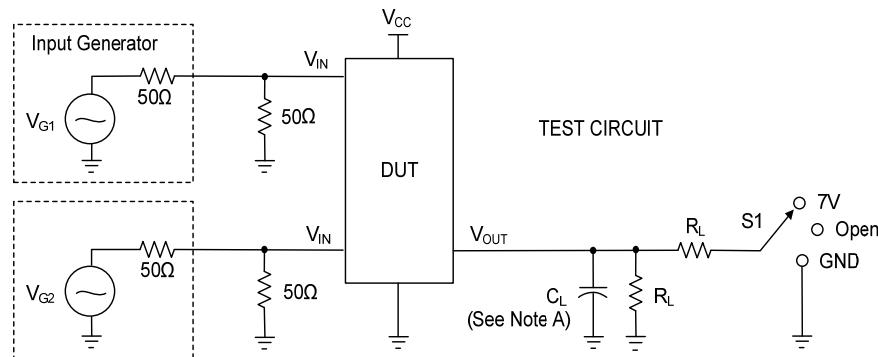

TEST	V_{CC}	V_I	t_R / t_F	$V\Delta$	S1	C_L	R_L
t_{PLH}/t_{PHL}	4V	V_{CC} or GND	$\leq 2.5\text{ns}$		Open	50pF	500Ω
	$5V \pm 0.5V$	V_{CC} or GND	$\leq 2.5\text{ns}$		Open	50pF	500Ω
t_{PLZ}/t_{PZL}	4V	GND	$\leq 2.5\text{ns}$	0.3V	7V	50pF	500Ω
	$5V \pm 0.5V$	GND	$\leq 2.5\text{ns}$	0.3V	7V	50pF	500Ω
t_{PHZ}/t_{PZH}	4V	V_{CC}	$\leq 2.5\text{ns}$	0.3V	Open	50pF	500Ω
	$5V \pm 0.5V$	V_{CC}	$\leq 2.5\text{ns}$	0.3V	Open	50pF	500Ω

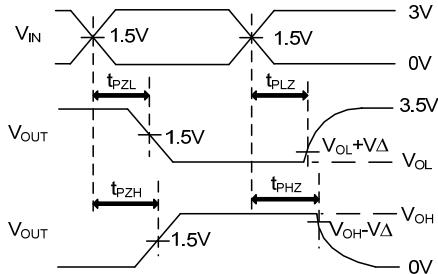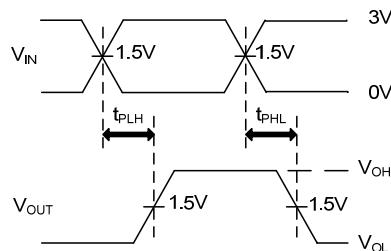

Notes:

1. C_L includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics: PRR $\leq 10\text{MHz}$, $Z_0=50\Omega$, $t_r \leq 2.5\text{ns}$, $t_f \leq 2.5\text{ ns}$.
3. The outputs are measured one at a time with one transition per measurement.
4. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
5. t_{PZL} and t_{PZH} are the same as ten.
6. t_{PLH} and t_{PHL} are the same as $t_{pd}(s)$.
7. All parameters and waveforms are not applicable to all devices.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.