




BRUSHLESS DC MOTOR DRIVER WITH INTEGRATED HALL SENSOR

DESCRIPTION

The UTC **UHC477** is a full-bridge motor driver for the single coil brushless DC motor. It is designed by advanced CMOS process, could worked in high voltage up to 20V Besides, this device has extremely low power dissipation, the quiescent current only 2.5mA.

The UTC **UHC477** includes the Hall sensor, Chopper for offset cancellation, Hall temperature compensation, voltage regulator, thermal shutdown and the output full bridge.

The UTC **UHC477** is optimized for vibration motor applications in single coil brushless direct current motor or fan.

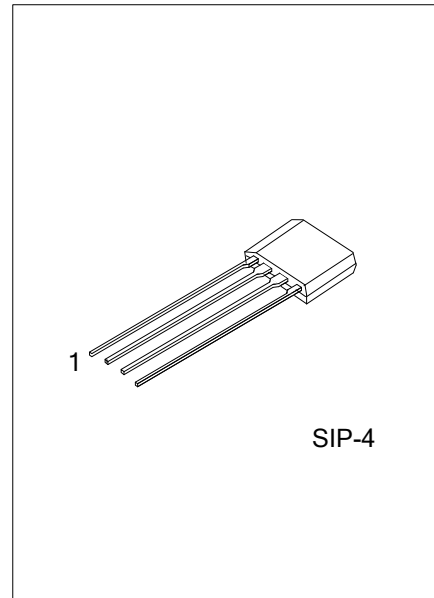

FEATURES


- * Built in Hall sensor
- * Built in 20V full-wave motor driver
- * Wide input range 3V~20V
- * Thermal shutdown protection
- * Excellent temperature stability
- * Output driver capability up to 300mA

ORDERING INFORMATION

Ordering Number		Package	Packing
Lead Free	Halogen Free		
UHC477L-G04-K	UHC477G-G04-K	SIP-4	Bulk

<p>UHC477G-G04-K</p> <p>(1)Packing Type (2)Package Type (3)Green Package</p>	<p>(1) K: Bulk (2) G04: SIP-4 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
--	---


MARKING

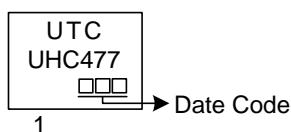

■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	V _{DD}	Power supply voltage
2	DO	First output
3	DOB	Second output
4	GND	Ground

■ BLOCK DIAGRAM

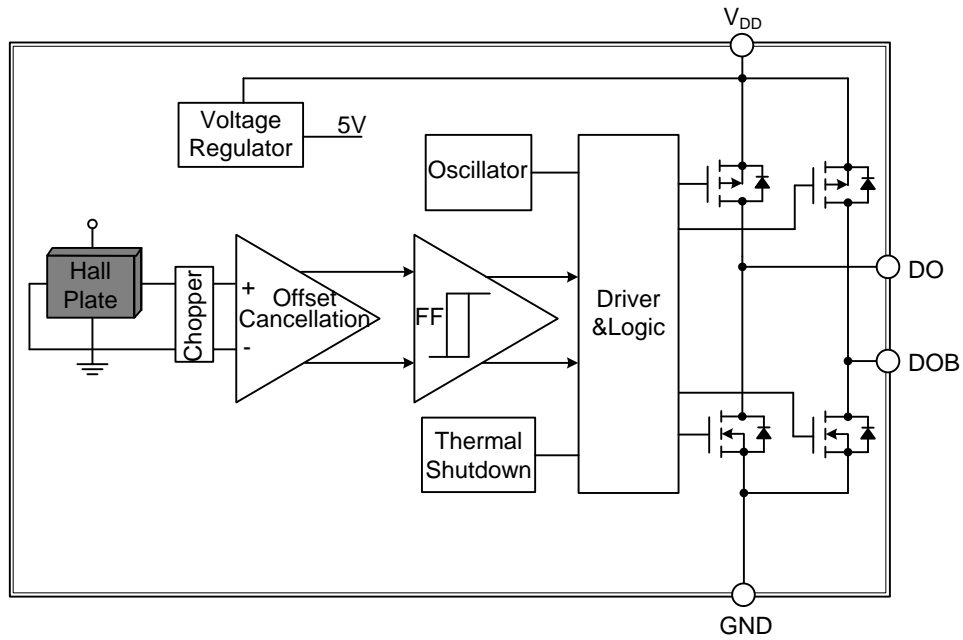

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Power Supply Voltage	V_{DD}	20	V
Continuous Output Current	I_{OUTC}	300	mA
Operating Ambient Temperature	T_A	-40 ~ +85	°C
Maximum Junction Temperature	T_J	+125	°C
Storage Temperature	T_S	-55 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Power Supply Voltage	V_{DD}	3.5 ~ 20	V

■ ELECTRICAL CHARACTERISTICS

($V_{DD}=18V$, $T_A=25^{\circ}C$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Supply Voltage Range	V_{DD}		3		20	V
Operating Current	I_{DD}			2	4	mA
Output Saturation Voltage (Sink)	V_{SAT}	$V_{DD}=14V$, $I_{OUT}=200mA$		0.4		V
Output Saturation Voltage (Source)		$V_{DD}=14V$, $I_{OUT}=200mA$		$V_{DD}-0.6$		V
Output Rising Time	t_r	$R_L=820\Omega$, $C_L=20pF$		1		
Output Falling Time	t_f	$R_L=820\Omega$, $C_L=20pF$		2.5		us
Dead Time	t_{Dead}	$R_L=820\Omega$, $C_L=20pF$		7.5		us
Thermal Shutdown Temperature	T_{SD}	$V_{IN}=18V$		160		°C
Temperature Hysteresis	ΔT_{SD}			30		°C

■ MAGNETIC PARAMETER


PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Operate Point	B_{OP}	5	25	45	Gauss
Release Point	B_{RP}	-45	-25	-5	Gauss
Hysteresis	B_{HYS}	20	50	80	Gauss

■ OUTPUT vs. MAGNETIC POLE


PARAMETER	TEST CONDITIONS	DO	DOB
North pole	$B < B_{RP}$	H	L
South pole	$B < B_{OP}$	L	H

Note: The magnetic pole is applied facing the branded side of the package.

■ TEST CIRCUIT

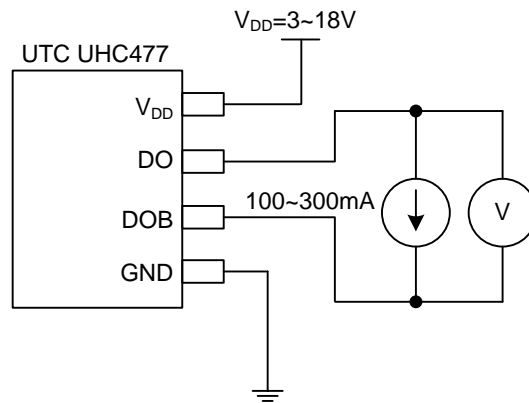


$R_{DS(on)}$ Test Circuit

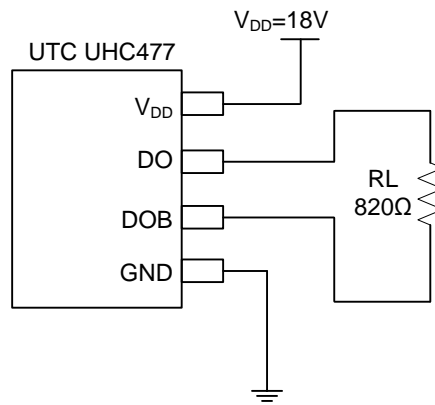

Switching Characteristics Test Circuit

■ TYPICAL APPLICATION CIRCUIT

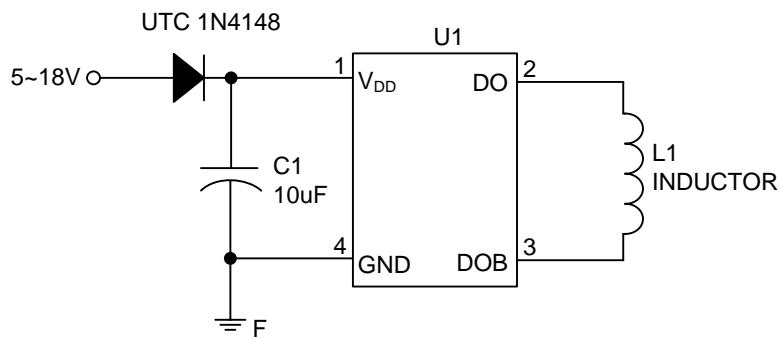

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.