



## IR8511

Preliminary

CMOS IC


### IR FILTER SWITCH DRIVER

#### DESCRIPTION

UTC **IR8511** is an IR filter switch driver IC designed for switching IR filter in IR-Cut (ICR). With appropriate input controls, UTC **IR8511** is made up of a one-channel, low saturation, bi-directional H-bridge driver. The protection diode circuit built in UTC **IR8511** can minimize the disturbance caused by the feedback current when ESD impulse occurs, or when the ICR is shut down.

The typical impedance of the current switches in UTC **IR8511** is less than 30Ohm. The current driven through the actuator is then determined by the impedance of the ICR. For example, with 5.0V power supply, the current through the actuator is around 300mA with 0.73V output voltage drop.

Two types of UTC **IR8511A** or **IR8511B** are offered to support single-wire control, dual-wire control and single-wire one-shot control modes.

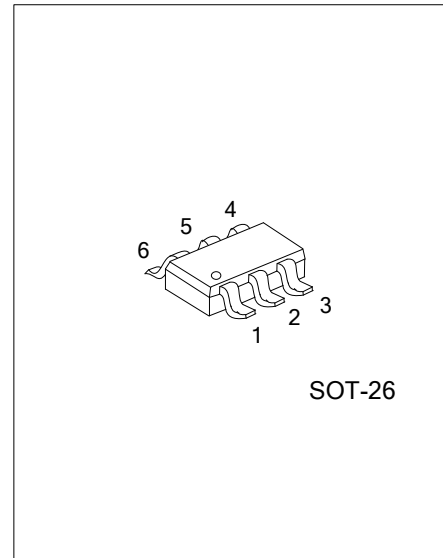

#### FEATURES


- \* 1.8V input driving pulse
- \* Low standby Current: IQSC<10uA
- \* 2.5V~5.5V operating voltage range
- \* Only one control input and Built-in non-overlap circuit to avoid the MOSFET damage caused by the fast output voltage transient

#### ORDERING INFORMATION

Ordering Number	Package	Packing
IR8511XG-AG6-R	SOT26	Tape Reel

<p>IR8511XG-AG6-R</p> <ul style="list-style-type: none"> <li>(1)Packing Type</li> <li>(2)Package Type</li> <li>(3)Green Package</li> <li>(4)Supply Current</li> </ul>	<ul style="list-style-type: none"> <li>(1) R: Tape Reel</li> <li>(2) AG6: SOT-26</li> <li>(3) G: Halogen Free and Lead Free</li> <li>(4) A: 20μA, B: 10μA</li> </ul>
---	--

#### MARKING




■ PIN CONFIGURATION




■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	ENB (For IR8511A )	Low-active enable
	CE (For IR8511B)	External capacitor
2	GND	Ground
3	FBC	Forward/Backward control
4	OUT1	Driver output 1
5	V <sub>DD</sub>	Power supply
6	OUT2	Driver output 2

■ BLOCK DIAGRAM

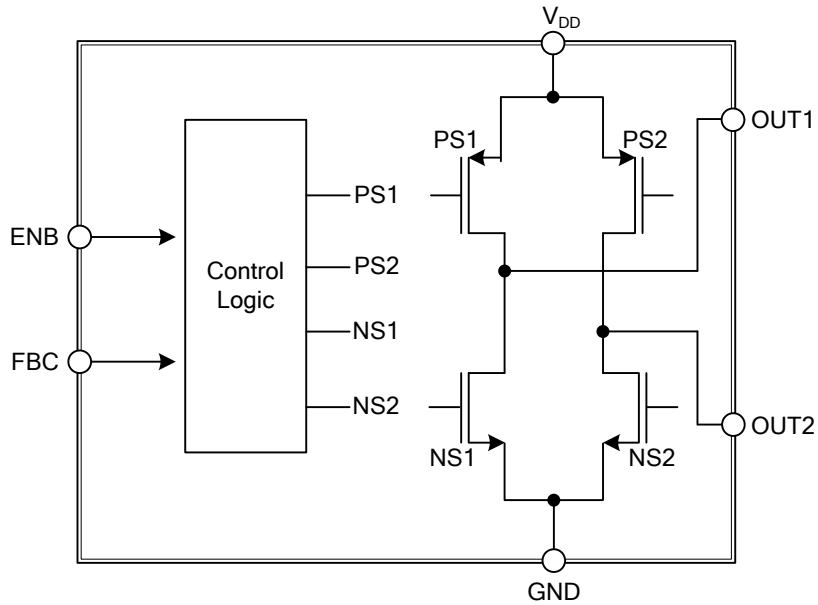

UTC IR8511A

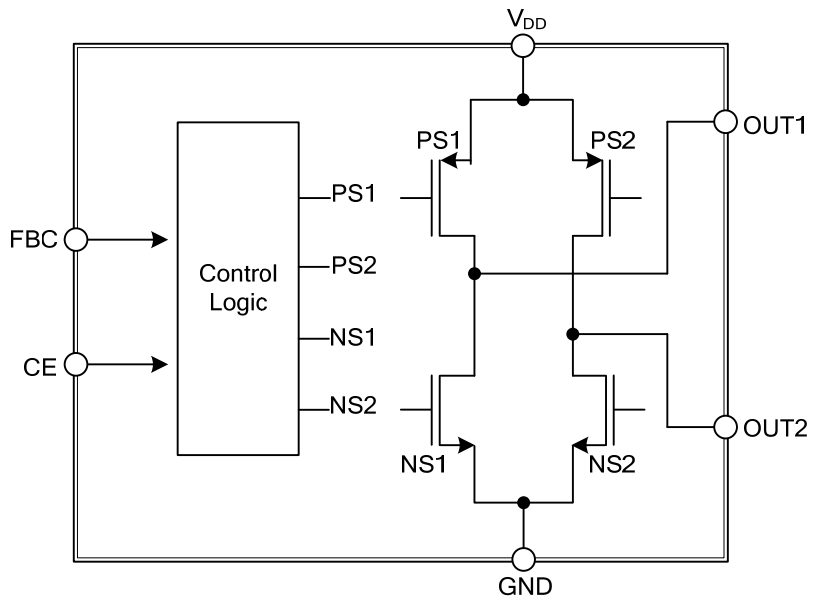

UTC IR8511B

■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{DD}$	5.5	V
Input Voltage	$V_{IN}$	$V_{DD}+0.4$	V
Output Current (100% duty)	$I_{OUT}$	500	mA
Output Current (50% duty)		600	mA
Operating Temperature Range	$T_{OPR}$	-40 ~ +125	°C
Storage Temperature Range	$T_{STO}$	-65 ~ +150	°C


Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ( $V_{IN}=5V$ ,  $T_A=25^{\circ}C$ , unless otherwise specified.)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Voltage	$V_{DD}$		2.5	5.0	5.5	V
Supply Current	$I_{STB(A)}$	Version A			20	$\mu A$
	$I_{STB(B)}$	Version B			10	$\mu A$
	$I_{DD}$	Transit State	0.7	1	1.3	mA
Driver Input Control ENB/FBC						
Input Logic "H"	$V_{IH}$				1.6	V
Input Logic "L"	$V_{IL}$		0.4			V
Driver Output OUT1/OUT2						
Output Voltage (upper+lower)	$V_{OUT1}$	$I_{OUT}=200mA$		0.42		V
	$V_{OUT2}$	$I_{OUT}=300mA$		0.73		V
	$V_{OUT3}$	$I_{OUT}=400mA$		1.03		V
Output Rise Time	$T_R$	From $0.1V_{DD}$ to $0.9V_{DD}$		2.5	5	ns
Output Fall Time	$T_F$	From $0.9V_{DD}$ to $0.1V_{DD}$		3.5	7	ns
Propagation Delay						
ENB->OUT1/2 (ENB Rising)	$T_{PLH}$	$V_{DD}=5V$ , Load=18 $\Omega$		13	16	ns

■ TYPICAL APPLICATION CIRCUIT OF UTC IR8511A

(a) Single-wire control by FBC

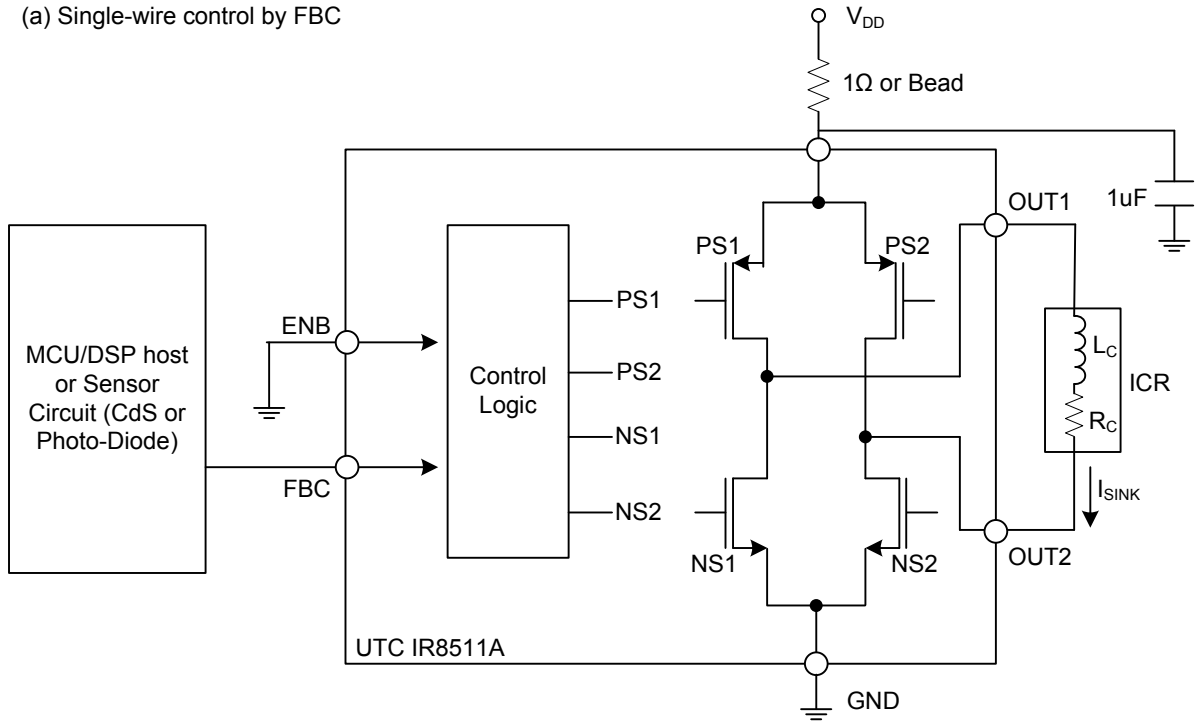


(b) Dual-wire control

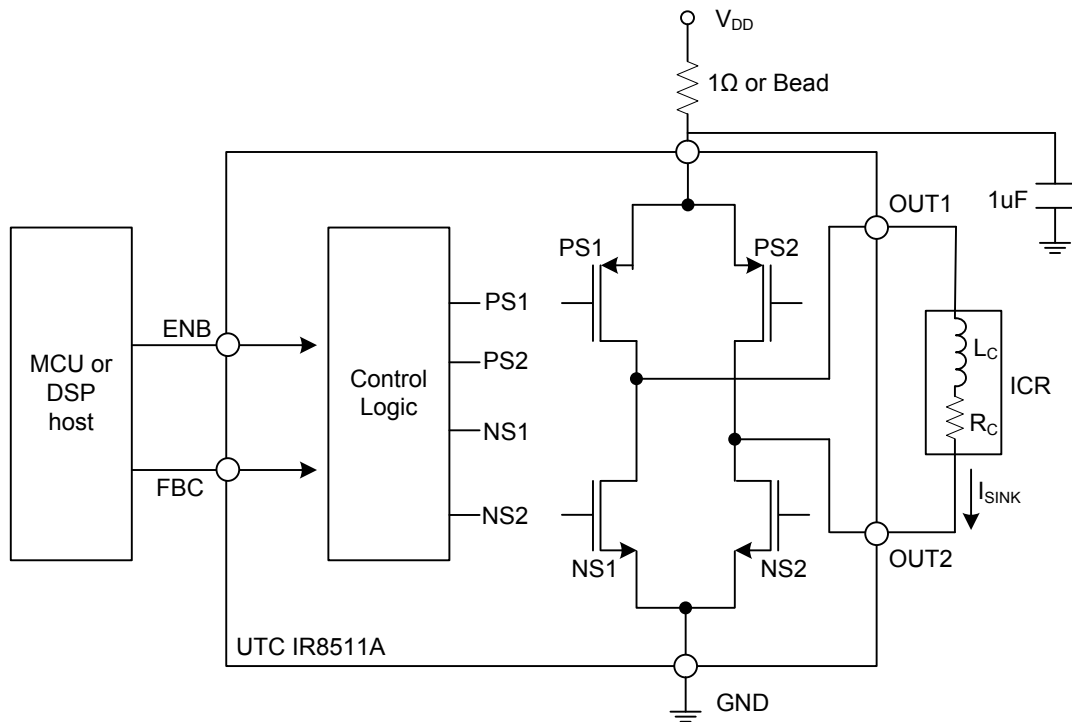

■ TYPICAL APPLICATION CIRCUIT OF UTC IR8511A (Cont.)

Table 1. Truth Table and Diagram of Controls

Input		OutInput	
ENB	FBC	OUT1	OUT2
H	X	L	L
L	H	H	L
L	L	L	H

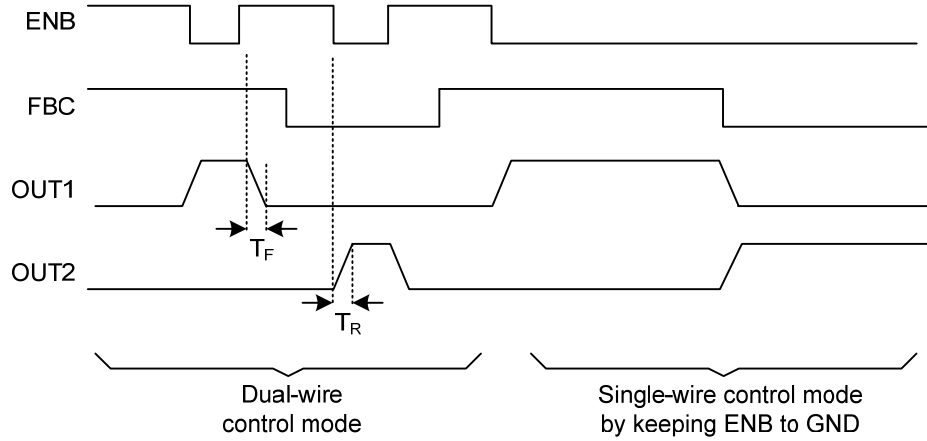

■ TYPICAL APPLICATION CIRCUIT OF UTC IR8511B


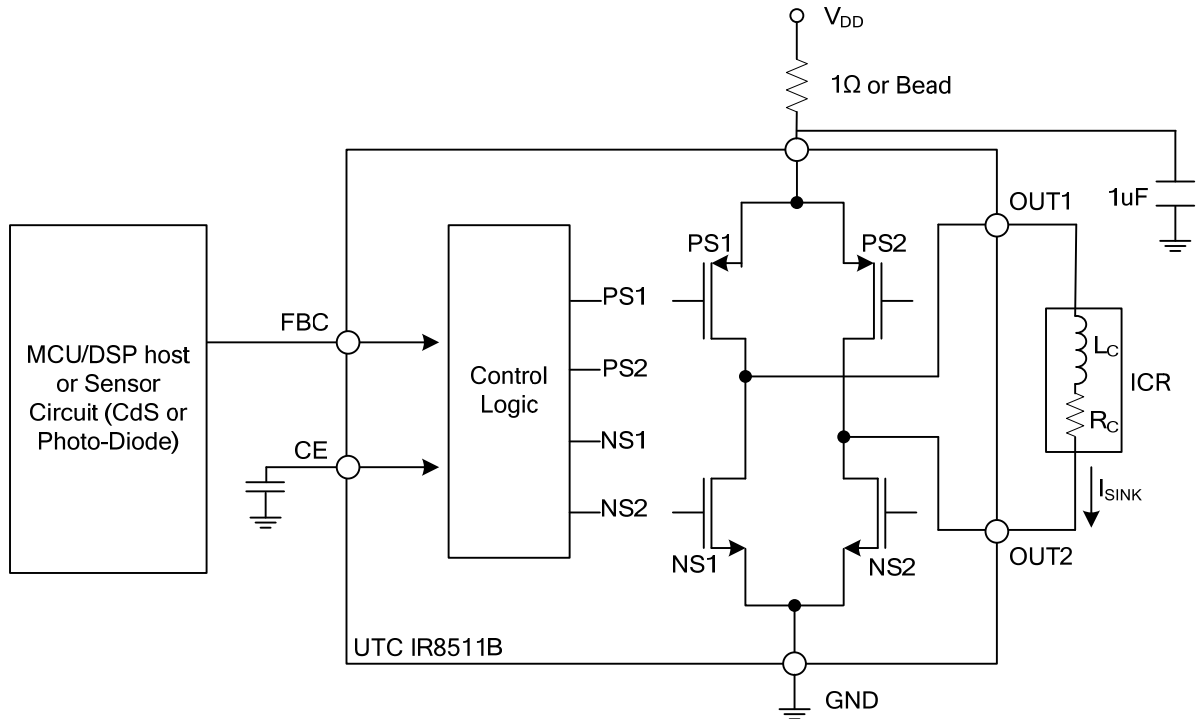


Table 2. Truth Table and Diagram of Controls

Input	Output	
FBC	OUT1	OUT2

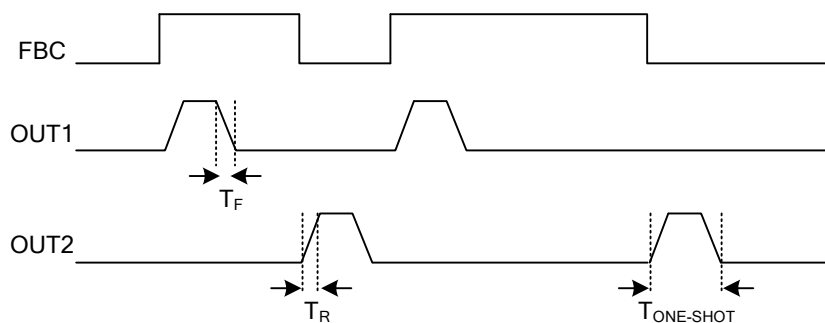

The period of T for One-Shot is determined by the external capacitor connected on C<sub>E</sub> pin. It can be estimated from the equation.

$$T = 2.5 \times C_{CE} (\mu F) \text{ second}$$

The time of one-shot would decrease 0.2%/°C by temperature increase with the constant capacitance of C<sub>CE</sub>. In fact, the capacitance of a real capacitor is affected by temperature change and has its maximum values at 25°C. It is suggested to set the time of one-shot more than twice the time that the ICR-module needs.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.