



UTG75N120-G2

Preliminary

Insulated Gate Bipolar Transistor

1200V TRENCH GATE FIELD-STOP IGBT

DESCRIPTION



The UTC **UTG75N120-G2** is an Trench Field-Stop Insulated Gate Bipolar Transistor. it uses UTC's advanced technology to provide customers with high switching speed, low saturation voltage and low switching loss, etc.

The UTC **UTG75N120-G2** is suitable for the resonant or soft switching applications.

FEATURES

- * High switching speed
- * High avalanche ruggedness
- * Low saturation voltage: $V_{CE(sat), typ} = 1.72V @ I_C = 75A (T_C = 25^\circ C)$
- * Low switching loss: $E_{OFF, typ} = 4.55mJ @ I_C = 75A (T_C = 25^\circ C)$

SYMBOL

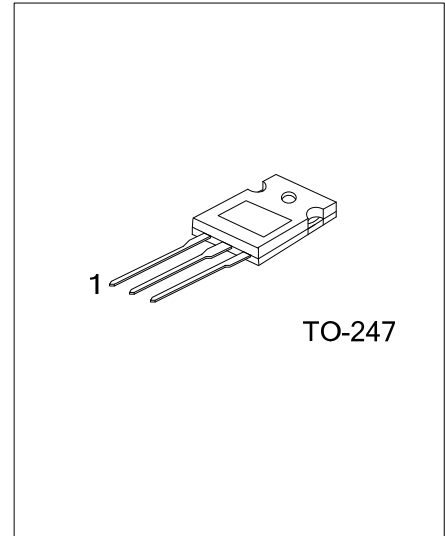


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
UTG75N120L-T47-T	UTG75N120G-T47-T	TO-247	G	C	E	Tube

Note: Pin Assignment: G: Gate C: Collector E: Emitter

<p>UTG75N120G-T47-T</p>	<p>(1) Packing Type</p> <p>(2) Package Type</p> <p>(3) Green Package</p>	<p>(1) T: Tube</p> <p>(2) T47: TO-247</p> <p>(3) G: Halogen Free and Lead Free, L: Lead Free</p>
-------------------------	--	--

MARKING

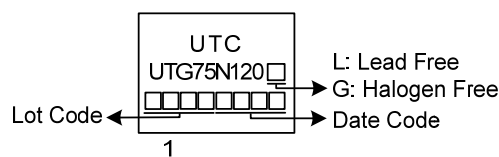

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATINGS	UNIT
Collector-Emitter Voltage	V_{CES}	1200	V
Gate-Emitter Voltage	V_{GES}	± 20	V
Continuous Collector Current	I_C	$T_C=25^\circ\text{C}$	150
		$T_C=100^\circ\text{C}$	75
Collector Current Pulsed (Note 1)	I_{CM}	300	A
Diode Forward Current	I_F	$T_C=25^\circ\text{C}$	150
		$T_C=100^\circ\text{C}$	75
Short Circuit Withstand Time $V_{GE} = 15\text{V}, V_{CC} \leq 200\text{V}$ Allowed number of short circuits < 1000 Time between short circuits: $\geq 1.0\text{s}$ $T_{VJ} = 25^\circ\text{C}$	t_{SC}	5	μs
Power Dissipation	P_D	285	W
Operating Junction Temperature	T_J	-40 ~ +175	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55 ~ +175	$^\circ\text{C}$

Notes: 1. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

Absolute maximum ratings are those values beyond which the device could be permanently damaged.

2. Pulse width limited by maximum junction temperature.

■ THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT
Junction to Case	θ_{JC}	0.44	$^\circ\text{C}/\text{W}$

■ ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Off Characteristics						
Collector-Emitter Breakdown Voltage	BV_{CES}		1200			V
Collector Cut-Off Current	I_{CES}	$V_{CE}=V_{CES}, V_{GE}=0\text{V}$			5	μA
G-E Leakage Current	I_{GES}	$V_{GE}=V_{GES}, V_{CE}=0\text{V}$			± 100	nA
On Characteristics						
Gate to Emitter Threshold Voltage	$V_{GE(TH)}$	$I_C=250\mu\text{A}, V_{CE}=V_{GE}$	4.5		7.5	V
Collector to Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=75\text{A}, V_{GE}=15\text{V}$		1.72	2.1	V
		$I_C=75\text{A}, V_{GE}=15\text{V}, T_C=125^\circ\text{C}$		2.1		V
Dynamic Characteristics						
Input Capacitance	C_{IES}	$V_{CE}=25\text{V}, V_{GE}=0\text{V}, f=1\text{MHz}$		5640		pF
Output Capacitance	C_{OES}			149		pF
Reverse Transfer Capacitance	C_{RES}			69		pF
Switching Characteristics						
Total Gate Charge	Q_G	$V_{CE}=600\text{V}, I_C=75\text{A}, V_{GE}=15\text{V}$		282		nC
Gate-Emitter Charge	Q_{GE}			54.5		nC
Gate-Collector Charge	Q_{GC}			154		nC
Turn-On Delay Time	t_{DON}	$V_{CC}=600\text{V}, I_C=75\text{A}, R_G=5\Omega,$ $V_{GE}=0\sim 15\text{V}, L=500\mu\text{H}$		46		ns
Rise Time	t_R			41		ns
Turn-Off Delay Time	t_{DOFF}			251		ns
Fall Time	t_F			182		ns
Turn-On Switching Loss	E_{ON}			4.09		mJ
Turn-Off Switching Loss	E_{OFF}			4.55		mJ
SOURCE- DRAIN DIODE RATINGS AND CHARACTERISTICS						
Forward Voltage Drop	V_{FM}	$I_F=75\text{A}$			2.5	V
Reverse Recovery Time	t_{rr}	$I_F=75\text{A},$		55.4		ns
Reverse Recovery Charge	Q_{rr}	$dI/dt=100\text{A}/\mu\text{s}$		2.78		μC

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.