



ULV601


CMOS IC

RAIL-TO-RAIL OUTPUT SINGLE CMOS OP AMPS

DESCRIPTION

The UTC **ULV601** family of low-power operational amplifier (op amps) is offered in single configurations. The op amps utilize an advanced CMOS technology that provides low bias current, high-speed operation, high open-loop gain, and rail-to-rail output swing. This product offering operates with a single supply voltage that can be as low as 2.7V, while drawing 200 μ A (typical) of quiescent current per amplifier. In addition, the common mode input voltage range goes 0.3V below ground, making these amplifiers ideal for single-supply operation.

The device is appropriate for low power, battery operated circuits due to the low quiescent current, for A/D convert driver amplifiers because of their wide bandwidth or for anti-aliasing filters by virtue of their low input bias current.

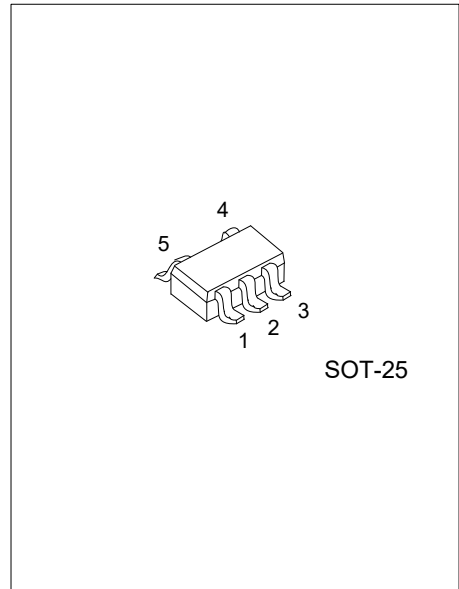

FEATURES


- * Supply Voltage: 2.7V ~ 6.0V
- * Supply Current: 200 μ A/amplifier (typical)
- * Input Offset Voltage: 2mV (Max)
- * Rail-to-Rail Output
- * Slew Rate: 2.3V/ μ s (Typ.)

ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
ULV601L-AF5-R	ULV601G-AF5-R	SOT-25	Tape Reel

<p>ULV601G-AF5-R</p> <ul style="list-style-type: none"> (1) Packing Type (2) Package Type (3) Green Package 	<ul style="list-style-type: none"> (1) R: Tape Reel (2) AF5: SOT-25 (3) G: Halogen Free and Lead Free, L: Lead Free
--	--

MARKING




■ PIN CONFIGURATION



■ PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	OUT	Output
2	V ⁻	Negative power supply
3	+IN	Non-inverting Input
4	-IN	Inverting Input
5	V ⁺	Positive power supply

■ BLOCK DIAGRAM

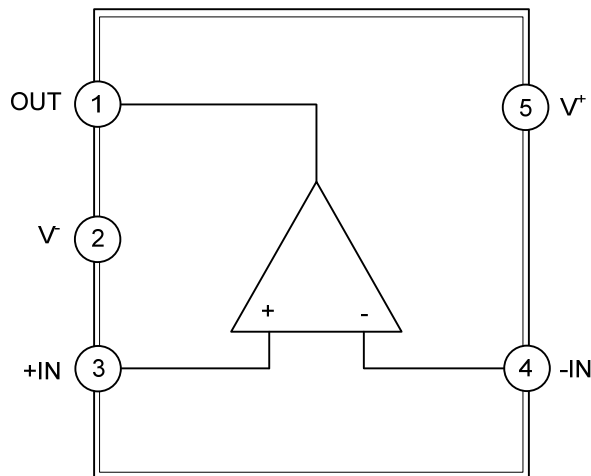

■ ABSOLUTE MAXIMUM RATING (T_A=25°C, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Power Supply	V ⁺ - V ⁻	7.0	V
Difference Input Voltage		V ⁺ - V ⁻	V
Current at Output and Supply Pins		±30	mA
Current at Input Pins	I _{IN}	±2	mA
Analog Inputs (V _{IN+} , V _{IN-})		V ⁻ -1.0 ~ V ⁺ +1.0	V
All Other Inputs and Outputs		V ⁻ -0.3 ~ V ⁺ +0.3	V
Maximum Junction Temperature	T _J	+150	°C
Storage Temperature	T _{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT
Thermal Resistance	θ _{JA}	225	°C/W

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V ⁺ - V ⁻	2.7 ~ 6.0	V
Operating Free-Air Temperature	T _{OPR}	-40 ~ +125	°C

■ ELECTRICAL CHARACTERISTICS

(T_A=25°C, V₊=+2.7 ~ +5.5V, R_L=100kΩ, V_{CM} = V₊/2, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Supply Current/Amplifier	I _Q	I _o =0		200	325	μA
Power Supply Rejection Ratio	PSRR	V ₊ = 2.7V ~ 5.5V	76	120		dB
Input Offset Voltage	V _{OS}		-2	±0.7	+2	mV
Input Offset Voltage Drift	ΔV _{OS} /ΔT	T _A = -40°C to +125°C		±2.5		μV/°C
Input Bias Current	I _B			1		pA
Input Offset Current	I _{OS}			±1		pA
Common-Mode Voltage Range	V _{CM}		V ⁻ -0.3		V ⁺ -1.2	V
Common-Mode Rejection Ratio	CMRR	V _{CM} =-0.3V~3.8V, V ⁺ =5.0V	75	90		dB
Large Signal Voltage Gain	A _v	R _L = 25kΩ V _{OUT} =0.1V~ V ⁻ - 0.1V	85	105		dB
		R _L = 5kΩ V _{OUT} =0.1V~ V ⁻ - 0.1V	80	100		dB
Output Voltage	V _o	R _L = 25kΩ, A _{OL} ≥ 100dB	V ⁺ +100		V ⁺ -100	mV
		R _L = 5kΩ, A _{OL} ≥ 95dB	V ⁺ +100		V ⁺ -100	mV
Short-Circuit Current	I _{SC}	Sourcing, V _O =0V		25		mA
		Sinking, V _O = V ⁺		20		mA
Slew Rate	SR			2.3		V/μs
Gain-Bandwidth Product	GBW			2.8		MHz
Phase Margin	Φ _M			25		degrees
Voltage Noise Density	e _n	f=1kHz		32		nV/√Hz
		f=10kHz		23		nV/√Hz

■ TEST CIRCUITS

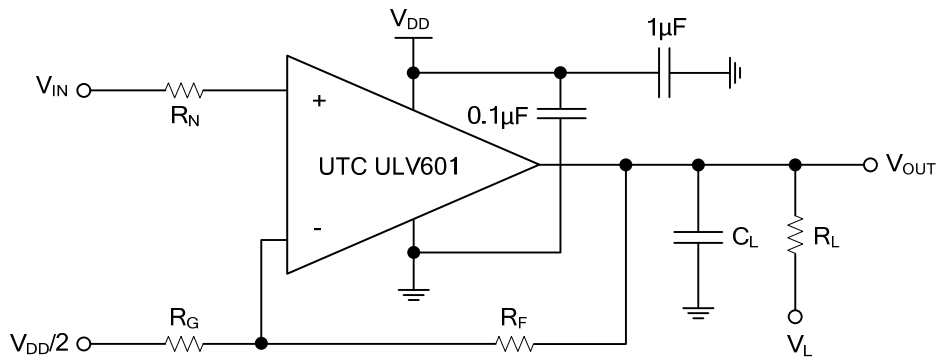


Figure 1. AC and DC Test Circuit for Most Non-Inverting Gain Conditions.







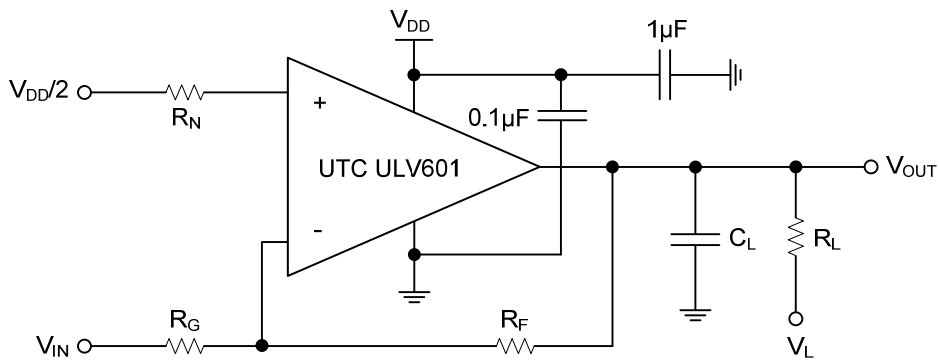


Figure 2. AC and DC Test Circuit for Most Inverting Gain Conditions.

TYPICAL CHARACTERISTICS

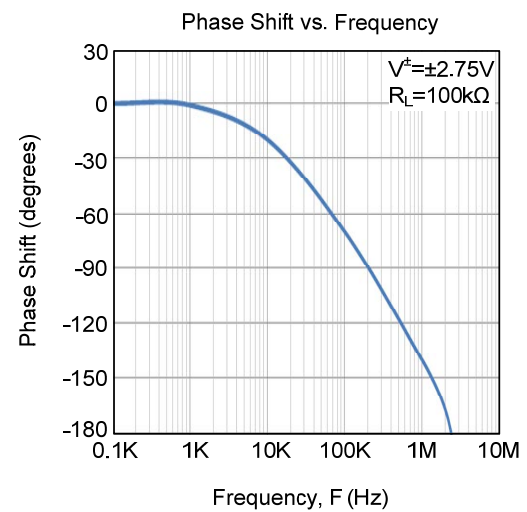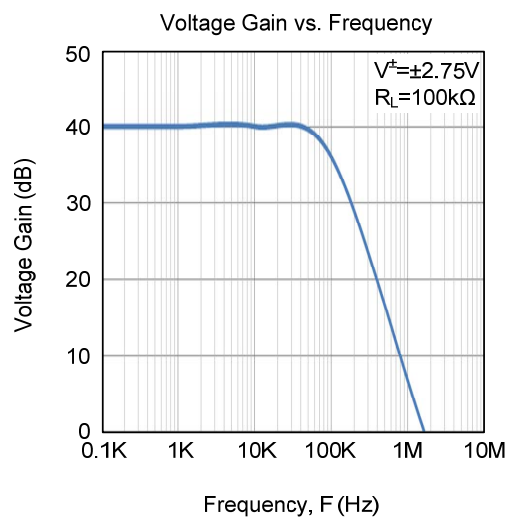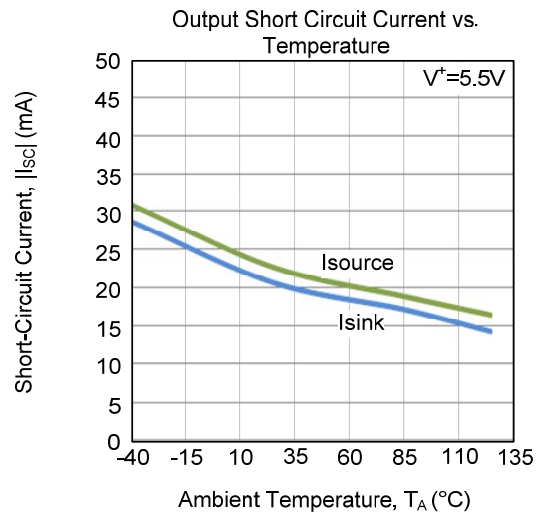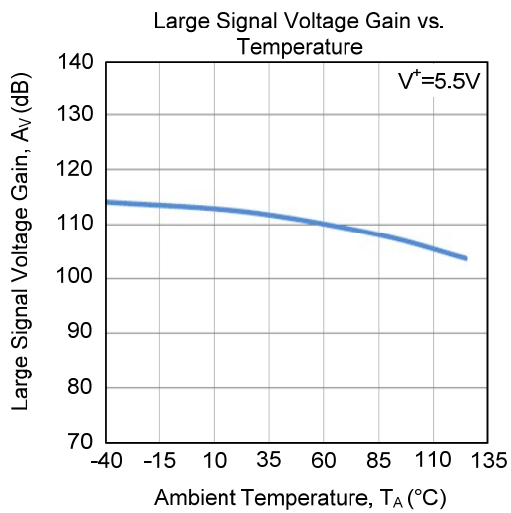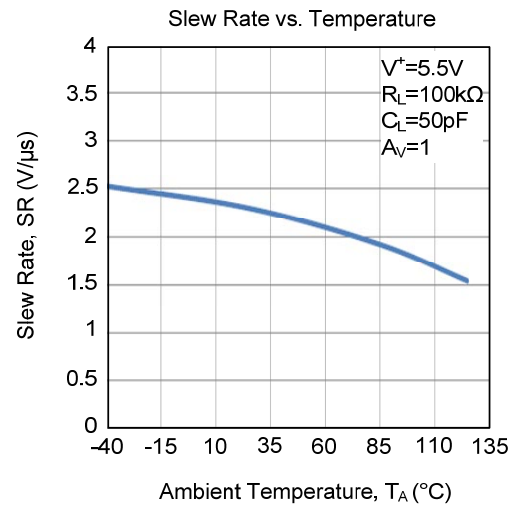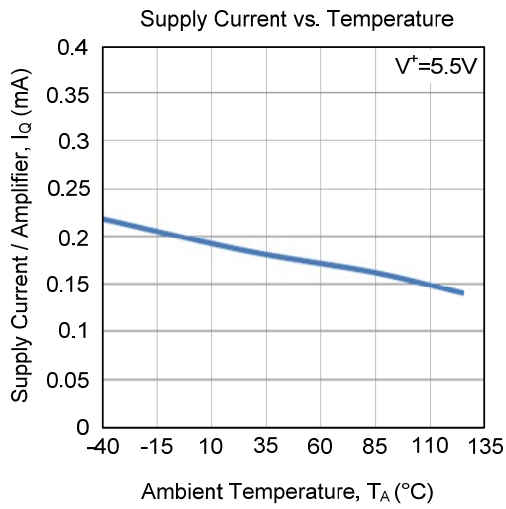

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.